

Pumps & garden

• Spid'O® garden	444	• Jung® pumps	466
• Spid'O® fittings	446	• Lifting stations	469
• Spid'O® accessories	448	• Pressurised water tanks	471
• Spid'O® specialities	449	• Manometers & pressure controllers	473
• Spid'O® pumps - Ecop	450	• Pressure switches	474
• Spid'O® pumps - Classic	452	• Automatic devices	475
• Spid'O® pumps - Pro	455	• Level control	476
• DAB® pumps	458	• Control panel	477
• Tsurumi® pumps	461	• Pipes & fittings	477
• Zenit® pumps	462	• Spid'O® swimming pool	478
• BBC® pumps	464	• Swimming pool - Professional	481
• Rover® pumps	466		

What's new!

Rainwater collecting sets



p. 460

Grinder dirty water pump



p. 482

Swimming pool pipe



p. 487

Swimming pool filtration



p. 465

blister
packaging



Individual
packing

ABS plastic quick fittings

■ Clic connect

Standard male connector 15 mm - Non-mandatory packing (indicative purpose).



Adaptor for nozzle valve

For Ø 15 to 17 mm nozzle

pack	code
5	295301



Coupling

pack	code
18	295901



Valve nozzle

F1/2"-3/4"
F3/4"-1"

pack	code
18	295251
14	295261



Female coupling

For pipe Ø 15 mm
For pipe Ø 19 mm

pack	code
14	295501
14	295511



Female coupling with aquastop

For pipe Ø 15 mm
For pipe Ø 19 mm

pack	code
14	295601
14	295611



2 way valve nozzle

w/ shut-off valves F3/4"

pack	code
16	295921



3 way selector

pack	code
3	295211



3 way metal selector

pack	code
3	291441



MINUT'O

Timer - 0 to 120 min

pack	code
12	006041



TEMP'O 12

Programmable timer - 12 pre-set programmes
+ solenoid valve + 2 AA batteries

pack	code
15	006051



8 position sprinkler



pack	code
6	298701



3 arm sprinkler



pack	code
6	298711



Male coupling

M3/4"

pack	code
18	295451



3 way junction

pack	code
18	295911



Nipple

Ø 15 mm
Ø 19 mm

pack	code
18	295701
14	295711



Male coupling

M3/4"

pack	code
14	295111

Fittings set

Includes: 1 valve nozzle F3/4"-1" + 1 quick fitting
+ 1 aquastop quick fitting



For pipe Ø 15 mm
For pipe Ø 19 mm

pack	code
16	295001
16	295011



Multijet water-hose nozzle

pack	code
16	298301



Multijet water-hose nozzle

Includes: 1 valve nozzle F1/2"-3/4" + 1 quick fitting
+ 1 aquastop quick fitting

For pipe Ø 15 mm
For pipe Ø 19 mm

pack	code
16	298311
16	298321



BASIC'O jet

2 jet spray gun

pack	code
16	298401



BASIC'O multi

9 jet spray gun

pack	code
10	298411



Spray gun set

Includes: 1 valve nozzle F1/2"-3/4" + 1 quick fitting +
1 aquastop quick fitting







For pipe Ø 15 mm
For pipe Ø 19 mm

pack	code
12	298351
12	298361





Watering box, see page 340



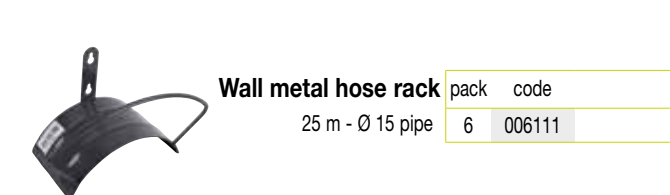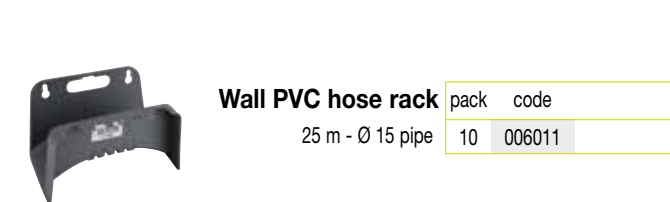
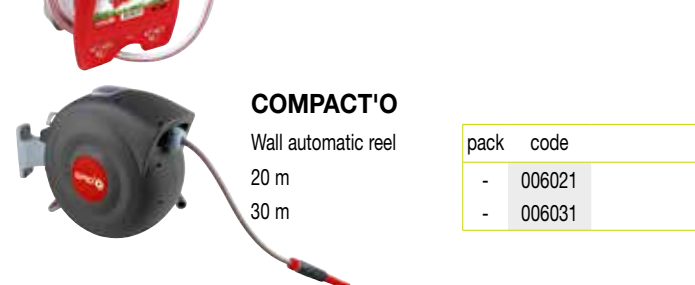
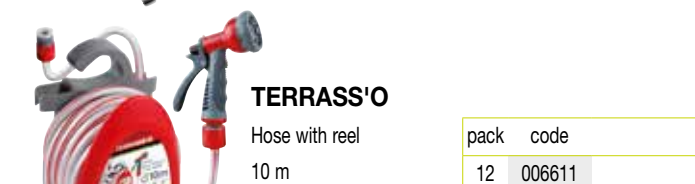


■ High flow

For pipe Ø 25 mm - Male connector 27 mm - Non-mandatory packing (indicative purpose).

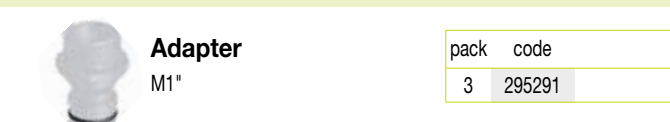

For pipe Ø 19 mm - Male connector 22 mm - Non-mandatory packing (indicative purpose).

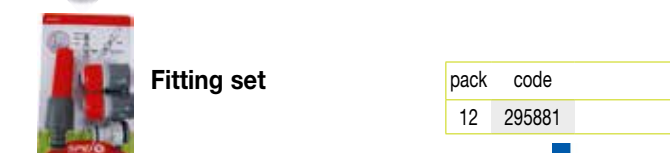

Brass fluted fittings

blister
packaging



2 piece hose nozzle captive gasket



Ø	1/2"-13	3/4"-15	3/4"-19	1"-19	1"-25	1"1/4-30
code	290401	290501	290511	290611	290621	290731

Male fitting



Ø	1/2"-13	3/4"-15	3/4"-19	1"-25	1"1/4-30
code	293401	293501	293511	293621	293731

3 piece captive gasket



Ø	1/2"-13	3/4"-15	3/4"-19	1"-25	1"1/4-30
code	292401	292501	292511	292621	292731

Hose nozzle



Ø	1"1/2-15	3/4"-20	1"-25	1"1/4-30
code	263141	263151	263161	263171

2 piece elbow



Ø	3/4"-15	1"-19
code	290001	290011

Spare gaskets (sold by 10)



Ø	1/2"-13	3/4"-15	3/4"-19	1"-19	1"-25	1"1/4-30
code	290139	290159	290199	290209	290259	290309

Nipple



Ø	15	19	25
code	294001	294011	294021

Elbow free nut



Ø	1/2"-13 to 15	3/4"-15 to 19
code	290101	290201

Tee



Ø	15	19
code	296001	296011

Water-hose nozzle



Ø	15	19
code	298001	298021

Y junction



F3/4" - M3/4"

code	
297551	

Y junction w/shut-off valves



F3/4" - M3/4"

code	
297001	

Brass quick fittings

blister
packaging



Compatible with ABS plastic quick fittings (page 436 & 437).

Coupling



Ø	15	19
code	291101	291111

Coupling stop pipe



Ø	15	19
code	291201	291211

Hose coupling nipple



Ø	15	19
code	291301	291311

Adaptor male



Ø	3/4"
code	291021

Elbow free nut



Ø	1/2"	3/4"
code	291241	291251

Nipple



Ø	15	19
code	291131	291231

Adaptor female



Ø	1/2"	3/4"	1"
code	291041	291051	291061

Double connection



code	
291401	

Water-hose nozzle



code	
291421	

Y junction



code	
291411	

Y junction shut-off valves



F3/4"

code	
291431	

Spare gaskets (sold by 10)



code	
291009	

Plastic couplings

blister
packaging



**Mandatory
packing applies**

Mandatory packing: 4 pcs.



Fluted straight

M1" - Fluted M20/25/19
F1" - Fluted M30/25 - With gasket
M1"1/4
F1"1/4 - MM1"1/4 - Fluted M25
F1"1/4 - Fluted M35/25
F1"1/4 - Fluted M38/25
M1"1/2 - Fluted M50/40 - With gasket
F1"1/2 - Fluted M24/32/40 - Free nut - With gasket
M2" - Fluted M50
F2" - Fluted M50

code

262131
262091
262481
262141
261071
261021
261081
261171
262511
262491



Fluted elbow

M1"
F1" - Fluted M25
M1"1/4 - Fluted M25 - With gasket
M1"1/4 - Fluted M30 - With gasket
M1"1/4 - Fluted M25/30 - Dismountable
F1"1/4 - Fluted M30 - Free nut - With gasket
M1"1/2 - Fluted M25/38
F1"1/2 - Fluted M40 - Free nut - With gasket
M2" - Fluted M50

code

262471
261011
262151
262161
262031
261191
261051
261181
262501



Fluted socket

1/2" - 1/2"
3/4" - 3/4"
1" - 1"
1"1/2 - 1"1/2

code

261361
261371
261381
261391



Threaded elbow male/female

MF1"
M1"1/4 - F1"
MF1"1/2

code

262111
262101
262121



Threaded elbow male/male

M1"1/4 - M1"

code

262171



Threaded nipple male/female

M3/4" - F1"
M1" - F3/4"
M1" - F1"1/4
M1" - F1"1/2
M1"1/4 - F1"
M1"1/4 - F1"1/2
M1"1/2 - F1"1/4

code

261121
261101
261131
261141
261111
261151
261161



Threaded nipple male/male

M1" - M1/2"
M1" - M3/4"
MM1"
M1"1/4 - M3/4"
MM1"1/4
M1"1/2 - M1"1/4
MM1"1/2
M2" - M1"1/2

code

262661
262681
262061
262671
262071
262691
262081
262701



Threaded nipple female/female

FF3/4"
FF1"
FF1"1/4
FF1"1/2

code

262011DI
262021
262031
262041



Check valve

MM1"
FM1"

code

262461
262561



Polyamide couplings

blister
packaging



Fluted union male straight

M1" - Fluted M25
M1"1/4 - Fluted M30
M1"1/2 - Fluted M40

code

264001
264011
264021




Fluted union male elbow

M1" - Fluted M25
M1"1/4 - Fluted M30
M1"1/2 - Fluted M35

code

264201
264211
264221




Fluted male

M3/4" - Fluted M20
M1" - Fluted M25
M1"1/4 - Fluted M30
M1"1/4 - Fluted M35
M1"1/2 - Fluted M40

code

264401
264411
264421
264431
264441



Fluted female with gasket

F3/4" - Fluted M20
F1" - Fluted M25
F1"1/4 - Fluted M30
F1"1/2 - Fluted M40

code

264501
264511
264521
264531



Threaded nipple male/male

M1"1/4 - M1"
M1"1/2 - M1"1/4

code

264301
264311



Check valve with strainer

F3/4"
F1"
F1"1/4

code

269001
269011
269021

Gear clamps



Stainless steel endless worm

8 mm wide, 3 m long & 8 heads, Ø 9 to 18 mm
13 mm wide, 3 m long & 6 heads, Ø 24 mm

code

299101

299111

Zinc-plated carbon steel 9 mm - Plain worm (sold by 2)

Ø	9/18	13/24	18/28	24/36	25/45	40/60
code	299092	299122	299112	299132	299142	299262

Stainless steel 9 mm - Plain worm (sold by 2)

Ø	9/18	13/24	18/28	24/36	25/45	40/60
code	299202	299212	299222	299232	299242	299462

Stainless steel 12 mm - Plain worm (sold by 2)

Ø	18/28	24/36	25/45	32/52	40/60
code	299322	299332	299342	299352	299362

Stainless steel double thread (sold by 2)

Ø	15/18	17/21	20/23	24/27	27/31	31/35	33/37	38/43	43/48	49/55
code	299512	299522	299582	299532	299592	299542	299547	299552	299562	299572



Zinc-plated carbon steel 9 mm with tightened key - Plain worm (sold by 2)

Ø	12/22	16/27	23/35
code	299602	299612	299622

6 pcs set **NEW**

1 pc 32/50, 1 pc 10/16,
2 pcs 10/27, 2 pcs 23/35

code

299699

PTFE band (sold by 10)

12 m long, 0,075 mm thick
12 mm wide
19 mm wide

code

262204

262304

Spid'O® accessories

Pumps accessories



	Ø	code
3-way fitting	1" FF 1"	BB11-008

	Ø	height (mm)	code
5-way fitting	1" FF 1" - F 1/4" - M 1/4"	81	RP5V
	1" FF 1" - F 1/4" - M 1/4"	92	BB11-007

	code
Pre-filter	260065

For pumps - Sand & solid particles (250 µ) - Brass drainage - Brass 1" inlet x 1" outlet - Easy maintenance.

	length (m)	Ø pipe	Ø	code
Plastic suction set	4	22	F 1"	003000
	7	22	F 1"	003005

PVC pipe - Food quality & safety - Includes plastic check valves & strainer.

	length (m)	Ø pipe	Ø	code
Brass suction set	5	22	F 1"	003010
	7	22	F 1"	003020

PVC pipe - Food quality & safety - Includes brass check valve & stainless steel strainer.

	length (m)	Ø pipe	Ø	code
Metal suction set	7	25	F 1"	003025
	7	30	F 1 1/4"	003030

PVC pipe - Food quality & safety - Includes brass fitting & check valve, stainless steel strainer, aluminium socket.

	length (m)	Ø pipe	Ø	code
Universal drainage set	5	25	F 1 1/4"	002200
	5	32	F 1 1/2"	002205

For all drainage/sewage/dirty water pumps PVC pipe.

Pumps accessories



Hydrotech 200

Lack of water & hammer protection - For 1~230V surface pumps - (max. power: 1,3 kW) - Max. pressure: 10 bar - Max. flow: 5 m³/h - Fittings MM 1".

code

003189

Brio 2000 M

Lack of water protection device - For surface & submersible pumps with pressure over 1,5 bar (max. power: 1,2 kW) - Max. pressure: 10 bar - Connections FM 1" - 1,5 m wire.

code

003251

Protection

Lack of water protection device - For surface pumps 1~230V, max. 10A - 2,3 kW - Pressure: 0,6 to 6 bar - Connections FM 1" - 1,2 m wire.

code

003361

HTX

Lack of water protection device - Manual resetting (restart) - For surface pumps 1~230V, 3 A to 8 A - Temperature: 5°C to 45°C.

code

003161



Spid'O® specialities

Portable engine driven pumps (SP 95)



Pallet of 24 pcs



T 414

Inlet & outlet M1".

power supply (hp)	max. flow (m³/h)	max. height (m)	max. suction (m)	fuel tank (l)	code
2,1	12	36	5	1,6	002814



T 420

Inlet & outlet M1"1/2.

Pallet of 20 pcs

power supply (hp)	max. flow (m³/h)	max. height (m)	max. suction (m)	fuel tank (l)	code
2,2	18	25	5	1,3	002820



T 435

Inlet M1"1/2 & outlet M1"1/2 or M1".

Pallet of 12 pcs

power supply (hp)	max. flow (m³/h)	max. height (m)	max. suction (m)	fuel tank (l)	code
5,6	25	60	6	3,6	002835

Gas oil transfer pump

For gas oil, fuel oil & biofuel.



TR 50

Includes 2 m suction set with M1" connections & check valve, gas oil nozzle, 4 m pipe with connections.



Rainwater pumps & manifolds



Pallet of 200 pcs



E 160

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	min. suction level (mm)	outlet Ø	code
80	0,1	1~230	3	3	3	M 3/4"	002201

Pallet of 80 pcs

EC 300

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	min. suction level (mm)	outlet Ø	code
350	0,5	1~230	3	10	3	M 3/4"	002800

**Sand
Grey**

Universal: can be mounted on any diameter of zinc, PVC or copper gutter (from Ø 80 to 110 mm) - Easy mounting: without any cutting or removing of gutter - Ready to be mounted: supplied with a drilled saw.

code
050646
050645

Tank set

For 1000 l rainwater tank.
Includes ball valve, fitting & PTFE band.

Ø	code
M 3/4"	262361
M 1"	263371

Booster pump



Pallet of 360 pcs



Booster

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (l/h)	max. height (m)	outlet Ø	code
45	0,06	1~230	250	7,5	M 1/2"	002730

Pool pump



Pallet of 64 pcs



ECC 150

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	code
320	0,4	1~230	7,5	6	002217

Vertical or horizontal position - Includes: support for horizontal position.

Spid'O® pumps - Ecop




Surface pumps




Pallet of 48 pcs

sold by 2 pcs



Ecop 150

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
600	0,8	1~230	2,8	32	5	002002




Ecop 140

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
600	0,8	1~230	3,6	35	5	002020

Pallet of 40 pcs

sold by 2 pcs




JE 600 P

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
600	0,8	1~230	3	35	7	002023

Pallet of 40 pcs

sold by 2 pcs




Ecop 160

power supply (W)	900	voltage (V-50Hz)	1~230	max. flow (m³/h)	3,6	max. height (m)	42	max. suction (m)	5	code	002040
---------------------	-----	---------------------	-------	---------------------	-----	--------------------	----	---------------------	---	------	--------

Pallet of 30 pcs

sold by 2 pcs




Ecop Bis 160

power supply (W)	800	voltage (V-50Hz)	1~230	max. flow (m³/h)	3,6	max. height (m)	40	max. suction (m)	7	code	002165
---------------------	-----	---------------------	-------	---------------------	-----	--------------------	----	---------------------	---	------	--------

Pallet of 28 pcs

Includes press control.

Booster sets




— Ecop 140/20

— Ecop 160/20

power supply (W)	600	voltage (V-50Hz)	1~230	max. flow (m³/h)	3,6	max. height (m)	35	max. suction (m)	5	tank (l)	20	code	002161
	1000		1~230		3,6		42		5		20		002120

Pallet of 18 pcs




Ecop Bis 160/20

power supply (W)	1000	voltage (V-50Hz)	1~230	max. flow (m³/h)	4,5	max. height (m)	45	max. suction (m)	7	tank (l)	24	code	002169
---------------------	------	---------------------	-------	---------------------	-----	--------------------	----	---------------------	---	----------	----	------	--------

Pallet of 12 pcs

Drainage clear water pump




Ecop 100

power supply (W)	250	voltage (V-50Hz)	1~230	max. flow (m³/h)	6	max. height (m)	6	code	002236
---------------------	-----	---------------------	-------	---------------------	---	--------------------	---	------	--------

Pallet of 72 pcs

sold by 4 pcs

Sewage pumps




Ecop 105

power supply (W)	400	voltage (V-50Hz)	1~230	max. flow (m³/h)	9	max. height (m)	5,5	code	002237
---------------------	-----	---------------------	-------	---------------------	---	--------------------	-----	------	--------

Pallet of 72 pcs

sold by 4 pcs




Ecop 115

power supply (W)	550	voltage (V-50Hz)	1~230	max. flow (m³/h)	12	max. height (m)	6	code	002260
---------------------	-----	---------------------	-------	---------------------	----	--------------------	---	------	--------

Pallet of 60 pcs

sold by 4 pcs



Ecop Bis VC 550

power supply (W)	550	voltage (V-50Hz)	1~230	max. flow (m³/h)	13,5	max. height (m)	7	code	002264
---------------------	-----	---------------------	-------	---------------------	------	--------------------	---	------	--------


Pallet of 72 pcs

sold by 4 pcs





Surface pumps




Jetcom 550 pack

Includes 4 m suction set, check valve, quick fittings F1" & F Ø15, aquastop quick fitting Ø 15, 20 m watering pipe, water-hose nozzle with quick connection.

power supply (W)	voltage (hp)	(V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
550	0,7	1-230	2,8	42	7	002056

Pallet of 24 pcs




JC 800 P

Includes 5 m suction set (with plastic check valve and strainer).

power supply (W)	voltage (hp)	(V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
800	1.1	1~230	3.6	37	7	002091


Pallet of 24 pcs



JC 800 P2

power supply (W)	voltage (hp)	(V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
800	1.1	1-230	3.5	40	7	002063


Pallet of 35 pcs



Jetinox 800

power supply (W)	voltage (hp)	(V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
800	1.1	1~230	3.3	46	7	002064


Pallet of 40 pcs



AF 100

power supply (W)	voltage (hp)	(V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
1000	1.3	1~230	4	45	7	002034

Pallet of 30 pcs




AMX 50/4

AMX 50/5

power supply (W)	voltage (hp)	(V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
1100	1,5	1~230	5,4	45	7	002745
1300	2,0	1~230	5,4	55	8	002755

Pallet of 18 pcs

Automatic surface pumps




K 800 automatic

Includes automatic & lack of water protection device & built-in manometer.

power supply (W)	voltage (hp)	(V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
800	1.1	1~230	3.3	46	7	002164

Pallet of 40 pcs



JCA 800 P2


power supply (W)	voltage (hp)	(V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
800	1.1	1~230	3.5	40	7	002163

Pallet of 28 pcs

Automatic & built-in lack of water protection device.



Booster sets




BF 100/20: pallet of 18 pcs
BF 100/50: pallet of 8 pcs

BF 100/20

BF 100/50


power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	tank (l)	code
1000	1,3	1~230	4	45	7	24	002142
1000	1,3	1~230	4	45	7	50	002155



Pallet of 15 pcs

GC 1100 P 24B


power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	tank (l)	code
1100	1,5	1~230	4,5	45	7	24	002143



Pallet of 15 pcs

GC 1100 F 50H5


power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	tank (l)	code
1100	1,5	1~230	4,5	45	7	50	002159



Pallet of 12 pcs

GC 800 I 24H5


power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	tank (l)	code
800	1,1	1~230	3,3	46	9	24	002137



Pallet of 8 pcs

GC 1200 I 50H5

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	tank (l)	code
1200	1,6	1~230	4,4	50	7	50	002176




Pallet of 14 pcs

BMX 4/24

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	tank (l)	code
1100	1,5	1~230	5,4	48	7	24	002186

Drainage & sewage pumps



VCDC 500 P2
Flooding Kit 500*



Flooding Kit 500

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	residual level (mm)	outlet Ø	code
500	0,7	1~230	12,5	6	1 (clear water) 40 (waste water)	F 1"1/2	002262 002290

Pallet of 55 pcs

Passing through Ø 30 mm.

* Includes VCDC 500 P2 pump, 10 m flat pipe Ø 35 mm, clamp ring & case.



CDW 400
CDW 800



Manual/automatic
switch



Clear water




Sewage water

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	residual level (mm)	outlet Ø	code
400	0,5	1~230	7	5	5 (clear water) 25 (waste water)	M 1"1/2	002250
800	1,1	1~230	14	9		M 1"1/2	002261

Pallet of 34 pcs

Passing through Ø 25 mm - Built-in level switch.

Sewage pumps




VCD 400 P2

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	outlet Ø	code
400	0,5	1~230	9	5	M 1"1/4	002255

Pallet of 72 pcs

Passing through Ø 35 mm.




ECC 190

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	residual level (mm)	outlet Ø	code
750	1	1~230	12,5	8	45	F 1"1/2	002227

Pallet of 60 pcs

Passing through Ø 30 mm.




VCD 750 PI

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	outlet Ø	code
750	1	1~230	17	9	F 1"1/2	002258

Pallet of 48 pcs

Passing through Ø 35 mm.




VCD 1000 I

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	outlet Ø	code
1000	1,3	1~230	19,5	9	F 1"1/2	002259

Pallet of 60 pcs

Passing through Ø 35 mm.

Well pump



B 90/3


power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	max. submersion depth (m)	pump Ø (mm)	outlet Ø	code
950	1,3	1~230	6	34	7	157	M 1"1/4	002509

Pallet of 40 pcs

Includes 10 m rope.



Borehole pumps Ø 4"



Pallet of 40 pcs

- Subinox 6
- Subinox 7

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	max. submersion depth (m)	outlet Ø	code
800	1,1	1~230	5,1	42	12	F 1"1/4	002306
900	1,2	1~230	5,1	51	20	F 1"1/4	002307

Includes starting panel, electric cable & 20 m rope.


Spid'O® pumps - Pro



Surface pumps




Pallet of 24 pcs



Jetinox 550 kit

power supply (W)	power supply (hp)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
550	0,7	1~230	2,4	2,9	42	7	002051


Includes 4 m suction set with check valve.



Jetinox 1200

power supply (W)	power supply (hp)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
1200	1,6	1~230	5,2	4,5	50	7	002074


Pallet of 30 pcs



Plurinox 1200

power supply (W)	power supply (hp)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
1200	1,6	1~230	5,2	6	55	8	002756


Pallet of 30 pcs



Plurinox 1900

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
1900	2,5	1~230	6,4	57	7	002758

Pallet of 28 pcs




Spivario X 560

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
560	0,75	1~230	4,9	32	7	002768

Pallet of 30 pcs

Speed variation.



Spivario Box 1200

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
1200	1,6	1~230	7,2	50	6	002188

Pallet of 15 pcs

Speed variation.






Pallet of 18 pcs




Booster sets



X80/20 Protec

power supply (W)	voltage (hp)	(V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	max. suction (m)	tank (l)	code
800	1,1	1~230	3,5	3,3	46	7	22	002136


Pallet of 18 pcs



X120/50 Protec

power supply (W)	voltage (hp)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	max. suction (m)	tank (l)	code
1200	1.6	1~230	5.2	4.4	50	7	50	002156

Pallet of 4 pcs




GP 1300F 100H5

power supply (W)	voltage (hp)	max. flow (m³/h)	max. height (m)	max. suction (m)	tank (l)	code
1300	1.7	1-230	4.5	52	7	100
						002166

Sewage pumps



Pallet of 36 pcs




KTP 300

Passing through Ø 10 mm.

power supply (W)	voltage (hp)	max. flow (m³/h)	max. height (m)	outlet Ø	code	
300	0,4	1~230	8	6,2	F 1"	KTP300

Pallet of 12 pcs




MINI LIFT S

Passing through Ø 10 mm - Dimension: 438 x 332 x 300 mm.

power supply (W)	voltage (hp)	max. flow (V-50Hz)	max. flow (m³/h)	max. height (m)	outlet Ø	code
300	0,4	1~230	8	6,2	F 1"	MINI LIFT S

Pallet of 96 pcs




Maxinox 500

Passing through Ø 25 mm.

power supply (W)	voltage (hp)	max. flow (m³/h)	max. height (m)	outlet Ø	code
500	0.7	1-230	10.5	7	M 1"1/4
					002213


Pallet of 72 pcs



Maxinox 700

Passing through Ø 30 mm.


power supply (W)	voltage (hp)	max. flow (m³/h)	max. height (m)	outlet Ø	code	
700	0.9	1-230	18	8	M 1"1/2	002214



ECC Pro 300

With Vortex stainless steel impeller - Passing through Ø 40 mm.

Pallet of 40 pcs							
power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	residual level (mm)	outlet Ø	code
1200	1,6	1~230	19,5	10,5	55	M 1"1/2	002253




KTP 500 II

Passing through Ø 10 mm - Includes 10 m cable.

Pallet of 36 pcs						
power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	outlet Ø	code
500	0,7	1~230	10	8	F 1"1/4	002266

Dirty water pump




ECC Pro 400

With Vortex stainless steel impeller - Passing through Ø 40 mm.

Pallet of 40 pcs							
power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	residual level (mm)	outlet Ø	code
1500	2,0	1~230	24	11	55	F 2"	002254


Grinder dirty water pumps



STZ 1000

Passing through Ø 10 mm - Includes 10 m cable.

Pallet of 18 pcs						
power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	outlet Ø	code
1080	1,45	1~230	14	10	F 1"1/4	STZ1000



ECC Pro 500

Passing through Ø 40 mm - Includes 10 m cable.

Pallet of 28 pcs						
power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	outlet Ø	code
1600	2,2	1~230	18	15	F 2"	002270

Borehole pump Ø 4"



50/8 Auto

Includes starting panel & lack of water protection, electric cable & 20 m rope.

Pallet of 40 pcs							
power supply (W)	power supply (hp)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	max.submer. depth (m)	outlet Ø
1100	1,5	1~230	4,8	6	57	17	F 1"

Self-priming pumps



	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
Jet 82 M	600	1~230	3,8	3,6	47	8	016080
Jet 82 T	600	3~400	1,6	3,6	47	8	016085
Jet 102 M	750	1~230	5,1	3,6	54	8	016100
Jet 102 T	750	3~400	1,9	3,6	54	8	016105
Jet 112 M	1000	1~230	6,2	3,6	60	8	016112
Jet 112 T	1000	3~400	2,5	3,6	60	8	016113
Jet 132 M	1000	1~230	6,6	4,8	48	8	016132
Jet 132 T	1000	3~400	2,7	4,8	48	8	016133



	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
Jet 151 M	1100	1~230	7,2	4,2	58	8	010150
Jet 151 T	1100	3~400	3	4,2	58	8	010155
Jet 251 M	1850	1~230	10	7,2	60	8	010250
Jet 251 T	1850	3~400	4	7,2	60	8	010255



	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
Euro Inox 30/30 M	450	1~230	3,2	3,3	46,0	8	030080
Euro Inox 30/50 M	550	1~230	3,9	4,8	42,2	8	030100
Euro Inox 30/50 T	550	3~400	1,6	4,8	42,2	8	030105
Euro Inox 40/50 M	550	1~230	5,3	4,8	57,7	8	030110
Euro Inox 40/50 T	550	3~400	2,2	4,8	57,7	8	030115
Euro Inox 50/50 M	1000	1~230	6,3	4,8	72	8	030120
Euro Inox 50/50 T	1000	3~400	2,5	4,8	72	8	030125



	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	max. suction (m)	code
Multi Inox 3M	550	1~230	3,7	3,6	34,0	8	030163
Multi Inox 4M	750	1~230	4,5	5	46,0	8	030164
Multi Inox 5M	1000	1~230	5,5	5	58,0	8	030165

With stainless steel F304 impellers.

Peripheral pumps



	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	code
KPS 30/16 M	300	1~230	2	1,8	32,5	031090
KPS 30/16 T	300	3~400	0,9	1,8	32,5	031095

Booster sets



	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	max. suction (m)	tank (l)	code
Aquajet 82/20 M	600	1~230	3,8	3,6	47	8	20	201029
Aquajet 102/20 M	750	1~230	5,1	3,6	54	8	20	201032
Aquajet 102/60 M	750	1~230	5,1	3,6	54	8	60	201026

Supplied mounted.



esybox

Steady pressure booster set - Includes: self-priming pump, frequency regulator, pressure sensor, flow sensor, LCD screen & expansion tank.

- Economical: energy saving thanks to the frequency regulator - Silent.
- Compact: installation everywhere (even in tiny rooms) - 30% smaller than a traditional set - No additional tank.
- Convenient: easy maintenance & installation - Direct access to the pump stem, the filling cap & the expansion tank.
- Various connections.
- Wireless: up to 4 Esybox connected.

	power supply (W)	voltage (V-50Hz)	hp	amp. (A)	max. flow (m ³ /h)	max. height (m)	max. suction (m)	code
Esybox Mini	850	1~230	1,1	7	4,2	55	8	209501
Esybox 40/80	1550	1~230	2,1	10	7,2	62	8	209500



For Esybox & Esybox Mini - Includes float valve, check valve, suction & discharge pipe.

	tank (l)	code
Esytank	250	450160



Esybox Max on request



	code
Pack Esydock	209511

Drainage pumps



	power supply (W)	voltage (V-50Hz)	max. flow (m ³ /h)	max. height (m)	min. suction level (m)	outlet Ø	code
Verty Nova 200	220	1~230	6	6,2	3	M 1" 1/4	131003
Verty Nova 400	400	1~230	10	9	3	M 1" 1/4	131004

Built-in level switch - Max. particles 5 mm - Includes 10 m cable.



	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m ³ /h)	max. height (m)	min. suction level (m)	outlet Ø	code
Nova 180R automatic	200	1~230	0,9	4	5	77	F 1"	131150

Max. particles 5 mm - Includes 5 m cable.



	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m ³ /h)	max. height (m)	min. suction level (m)	outlet Ø	code
Nova 300R automatic	220	1~230	1,5	12	7,1	85	F 1"1/4	131157

Max. particles 10 mm - Includes 5 m cable.



	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m ³ /h)	max. height (m)	min. suction level (m)	outlet Ø	code
Nova-up 300 MAE	210	1~230	1,5	9	7,6	86	M 1"1/4	131123
Nova-up 600 MAE	520	1~230	3,4	12,9	9,8	150	M 1"1/4	131133

Electronic level detection - 5 mm suction height - Max. particles 10 mm - Includes 10 mm cable - Vertical outlet.



	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m ³ /h)	max. height (m)	min. suction level (m)	outlet Ø	code
Nova-up 600 automatic	520	1~230	3,4	13	9,8	150	M 1" 1/4	131090

Max. particles 10 mm - Includes 10 m cable - Vertical outlet.



Sewage pump

	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m ³ /h)	max. height (m)	min. suction level (m)	outlet Ø	code
Nova 600R automatic	500	1~230	3	12	10,4	190	F 1" 1/4	131160

Max. particles 10 mm - Includes 5 m cable.



NEW




Well pumps

	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	max. suction (m)	pump Ø (mm)	outlet Ø	code
Divertron 650	0,42	1-230	2,9	4,8	34	12	160	1"	152640
Divertron 650 aut.	0,42	1-230	2,9	4,8	34	12	160	1"	152641
Divertron 900	0,55	1-230	4,2	4,8	43	12	160	1"	152650
Divertron 900 aut.	0,55	1-230	4,2	4,8	43	12	160	1"	152651
Divertron 650-X*	0,42	1-230	2,9	4,8	30,4	12	160	1"	152646
Divertron 900-X*	0,55	1-230	4,2	4,8	45,8	12	160	1"	152656

Built-in automatic device with lack of water protection & check valve - Includes 15 m cable.

*For connection to rainwater collecting tank.



Suction set for rainwater collecting tank

Includes strainer basket & floating ball.

length (m)	code
1,5	355253
3	355237



Rope

length (m)	code
20	550504

NEW Rainwater collecting sets



Kit'O garden

For 3 outdoor valves - Includes: Divertron 1000-X pump, Hydra 1" RAH 90µ filter, 230V wired solenoid valve, 5 l tank, 20 m level switch, 5 "non potable water" icons.

code
353020



Kit'O house


For 2 outdoor valves, 2 toilets & 1 washing machine - Includes: Divertron 1000-X pump, Hydra 1" Rainmaster trio filter, 230V wired solenoid valve, 5 l tank, 20 m level switch, 5 "non potable water" icons.

code
353022






Drainage pumps



Oma 4

power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	outlet Ø	code
150	1~230	1,6	10	7,5	F 1 1/4"	133096

Max. particles 10 mm - Includes 10 m cable.




LSC1-4S

LSC E1-4S*

power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	outlet Ø	code
480	1~230	2,9	10	11	F 1"	133100
480	1~230	2,9	10	11	F 1"	133099

For complete drying surface - Max. particles 6 to 1 mm - Includes 10 m cable, gear clamp & 25 mm fitting.

* Pre-equipped for automatism with min. 1 mm suction height level switch.



LB-480 A


power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	outlet Ø	code
480	1~230	2,9	13	11	M 2"	133107

Max. particles 6 mm.

Sandy & muddy water pumps



HS2-4S set



- **HS2-4S**
- **HS2-4S set***
- **HS2-45 automatic**
- **HS2-75S**
- **HS3-75S**

power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	outlet Ø	code
400	1~230	2,6	11	12	M 2"	133101
400	1~230	2,6	11	12	M 2"	133108
400	1~230	2,6	11	12	M 2"	133104
750	1~230	4,6	13	18	M 2"	133106
750	1~230	4,6	18	18	M 3"	133102


Max. particles 7 mm - Includes 10 m cable.

* Includes HS2-4S pump, 15 m flat pipe Ø 50 mm, clamp ring & case. Dimensions: L 190 x W 390 x H 310.

Sewage pump



230 mm





Poma

power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	outlet Ø	code
150	1~230	1,6	12,5	6	F 2"	133097

Max. particles 35 mm - Includes 10 m cable.


For non automatic pumps: level switches, see page 476

Drainage pumps



	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	min. suction level (mm)	outlet Ø	code
– DR Blue 40 automatic	300	1~230	2,3	10,8	7	77	F 1"1/4	137004
– DR Blue 50 automatic	370	1~230	2,8	14,4	9,5	77	F 1"1/4	137005
– DR Blue 75 automatic	550	1~230	4,1	14,4	12	77	F 1"1/4	137007
– DR Blue 100 automatic	750	1~230	5,6	18	14,2	77	F 1"1/4	137010
– DR Blue Pro 50 automatic	370	1~230	2,8	14,4	8,7	77	F 1"1/4	137205
– DR Blue Pro 75 automatic	550	1~230	4,1	14,4	12,3	77	F 1"1/4	137207
– DR Blue Pro 75 T	550	3~400	1,6	14,4	12,3	77	F 1"1/4	137208
– DR Blue Pro 100 automatic	750	1~230	5,6	18	14,6	77	F 1"1/4	137210
– DR Blue Pro 100 T	750	3~400	2,2	18	14,6	77	F 1"1/4	137211
– DR Blue Pro 150 automatic	1100	1~230	7,5	36	14,4	77	F 2"	137215
– DR Blue Pro 150 T	1100	3~400	3,2	36	14,4	77	F 2"	137216
– DR Blue Pro 200 automatic	1500	1~230	10	36	17	77	F 2"	137218
– DR Blue Pro 200 T	1500	3~400	4,3	36	17	77	F 2"	137219

Max. particles 7 mm for DR Blue & 15 mm for DR Blue Pro - Includes 10 m cable.





	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	passing through (mm)	outlet Ø	code
– DR Steel 25 M auto. VLS*	250	1~230	2,3	7,2	8,5	10	F 1"1/4	137607
– DR Steel 25 M automatic	250	1~230	2,3	7,2	8,5	10	F 1"1/4	137608
– DR Steel 25 M auto. set**	250	1~230	2,3	7,2	8,5	10	F 1"1/4	137609
– DR Steel 37 M automatic	370	1~230	3,1	9	13,6	10	F 1"1/4	137610
– DR Steel 55 M automatic	550	1~230	4,3	18,1	12,4	12	F 1"1/2	137612
– DR Steel 75 M automatic	750	1~230	5,6	19,9	16	12	F 1"1/2	137614
– DR Steel 75 M***	750	1~230	5,6	19,9	16	12	F 1"1/2	137615
– DR Steel 75 T	750	3~400	2,4	19,9	16	12	F 1"1/2	137616

Max. particles 10 mm for DR 25 & DR 37, 12 mm for DR 55 & DR 75 - Includes 10 m cable.

* Vertical level switch.

** Includes DR Steel 25M automatic pump, 10 m pipe with quick fitting & case (may be used as a strainer while in use) - Dimensions (mm): L 60 x W 40 x H 35.

*** Without level switch.




Dirty water pumps



	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	min. suction level (mm)	outlet Ø	code
– DG Blue 40 automatic	300	1~230	2,3	14,4	6	122	F 1"1/2	137104
– DG Blue 50 automatic	370	1~230	2,8	18	7,6	122	F 1"1/2	137105
– DG Blue 75 automatic	550	1~230	4,1	21,6	10,1	122	F 1"1/2	137107
– DG Blue 100 automatic	750	1~230	5,6	25,2	11,6	122	F 1"1/2	137110
– DG Blue Pro 50 automatic	370	1~230	2,8	18	7	122	F 1"1/2	137305
– DG Blue Pro 75 automatic	550	1~230	4,1	21,6	10,2	122	F 1"1/2	137307
– DG Blue Pro 75 T	550	3~400	1,6	21,6	10,2	122	F 1"1/2	137308
– DG Blue Pro 100 automatic	750	1~230	5,6	25,2	11,4	122	F 1"1/2	137310
– DG Blue Pro 100 T	750	3~400	2,2	25,2	11,4	122	F 1"1/2	137311
– DG Blue Pro 150 automatic	1100	1~230	7,5	36	12,3	122	F 2"	137315
– DG Blue Pro 150 T	1100	3~400	3,2	36	12,3	122	F 2"	137316
– DG Blue Pro 200 automatic	1500	1~230	10	43,2	15,3	122	F 2"	137318
– DG Blue Pro 200 T	1500	3~400	4,3	43,2	15,3	122	F 2"	137319

Passing through Ø 40 mm - Includes 10 m cable.




	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	passing through (mm)	outlet Ø	code
— DG Steel 25 M automatic*	370	1~230	3,1	10,8	8,7	25	F 1"1/4	137600
— DG Steel 55 M automatic	550	1~230	4,3	19,9	8,1	40	F 1"1/2	137602
— DG Steel 75 M automatic	750	1~230	5,6	21,7	10	40	F 1"1/2	137604
— DG Steel 75 T	750	3~400	2,3	21,7	10	40	F 1"1/2	137606

Passing through Ø 40 mm (except DG 37: Ø 25 mm) - Includes 10 m cable.

* Sewage only.

Grinder dirty water pumps




	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	outlet Ø	code
— GR Blue Pro 150 M*	1,1	1~230	7,5	18	21,1	1"1/2	137520
— GR Blue Pro 150 M automatic*	1,1	1~230	7,5	18	21,1	1"1/2	137521
— GR Blue Pro 150 T	1,1	3~400	3,2	18	21,1	1"1/2	137525
— GR Blue Pro 150 T automatic	1,1	3~400	3,2	18	21,1	1"1/2	137526
— GR Blue Pro 200 M*	1,5	1~230	10	18	27	1"1/2	137530
— GR Blue Pro 200 M automatic*	1,5	1~230	10	18	27	1"1/2	137531
— GR Blue Pro 200 T	1,5	3~400	4,3	18	27	1"1/2	137535
— GR Blue Pro 200 T automatic	1,5	3~400	4,3	18	27	1"1/2	137536

Includes 10 m cable.


* Includes starting panel.

Sea water & brackish water pumps




	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	passing through (mm)	outlet Ø	code
— DRB 75/2/G32V	550	1~230	3,9	21,6	11,9	15	F 2"	139510
— DRB 150/2/G32V	1100	1~230	8,2	36	15,9	15	F 2"	139520

Multicanal impeller.



	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	passing through (mm)	outlet Ø	code
— DGB 75/2/G50V	550	1~230	3,9	21,6	8,5	38	F 2"	139410
— DGB 150/2/G50V	1100	1~230	8,2	32,4	14	38	F 2"	139420

Vortex impeller.



Drainage pumps - High-head


	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	outlet Ø	code
Semisom 130 H automatic*	1100	1~230	7,6	6	30	F 1"1/2	132001
Semisom 130 H M*	1100	1~230	7,6	6	30	F 1"1/2	132002
Semisom 130 H T	1100	3~400	2,9	6	30	F 1"1/2	132005

Max. particles 5 mm - Includes 10 m cable.

* Includes starting panel.




Dirty water pumps



	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	min. suction level (mm)	outlet Ø	code
Vertical outlet								
Semisom 265 automatic	550	1~230	4,2	12	8	200	F 2"	132038
Semisom 290 automatic	550	1~230	4,2	12	8	200	F 2"	136038
Horizontal outlet								
Semisom 290 automatic	550	1~230	4,2	12	8	200	F 2"	136039
Semisom 290 M + SP*	550	1~230	4,2	12	8	200	F 2"	136040
Semisom 290 M	550	1~230	4,2	12	8	200	F 2"	136050
Semisom 290 T	550	3~400	1,7	12	8	200	F 2"	136045
Semisom 290 T automatic	550	3~400	1,7	12	8	200	F 2"	136047

Passing through Ø 40 mm for Semisom 265 & Ø 50 mm for Semisom 290 - Includes 10 m cable.


* Includes starting panel.



	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	min. suction level (mm)	outlet Ø	code
Vertical outlet								
Semisom 490 automatic	1100	1~230	7,3	29	10	200	F 2"	136073
Horizontal outlet								
Semisom 490 automatic	1100	1~230	7,3	29	10	200	F 2"	136079
Semisom 490 M + SP*	1100	1~230	7,3	29	10	200	F 2"	136075
Semisom 490 M	1100	1~230	7,3	29	10	200	F 2"	136081
Semisom 490 T	1100	3~400	2,7	29	10	200	F 2"	136076
Semisom 490 T automatic	1100	3~400	2,7	29	10	200	F 2"	136071
Semisom 590 M auto. + SP*	1500	1~230	10,5	36	13	200	F 2"	136101
Semisom 590 M + SP*	1500	1~230	10,5	36	13	200	F 2"	136100
Semisom 590 T	1500	3~400	4,1	36	13	200	F 2"	136105

Passing through Ø 50 mm - Includes 10 m cable.


* Includes starting panel.



	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	min. suction level (mm)	outlet Ø	code
Semisom 500/50 M*	1100	1~230	9,2	30	9,5	275	F 2"	132100
Semisom 500/50 T	1100	3~400	3,3	30	9,5	275	F 2"	132105
Semisom 800/50 M*	1500	1~230	11,4	30	12	275	F 2"1/2	132110
Semisom 800/50 T	1500	3~400	4	30	12	275	F 2"1/2	132115
Semisom 900/50 M*	1500	1~230	11,4	48	16	275	F 2"1/2	132120
Semisom 900/50 T	1500	3~400	4	48	16	275	F 2"1/2	132125
Semisom 1000/50 T	2200	3~400	5,9	54	19,5	275	F 2"1/2	132135

Passing through Ø 50 mm - Includes 10 m cable.

* Includes starting panel.




- **Semisom 754/65 M***
- **Semisom 754/65 T**
- **Semisom 1100/65 T**
- **Semisom 1300/65 T**
- **Semisom 1500/65 T**

power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	min. suction level (mm)	outlet Ø	code
1200	1~230	7,7	42	7,3	275	F 3"	132140
1200	3~400	3,3	42	7,3	275	F 3"	132145
2200	3~400	6	48	12	275	F 3"	132155
3400	3~400	8,1	54	17	275	F 3"	132165
3400	3~400	9	78	17,5	275	F 3"	132175

Passing through Ø 65 mm - Includes 10 m cable.

* Includes starting panel.



- **Semisom 1504/80 T**
- **Semisom 1055/80 T**
- **Semisom 1675/80 T**
- **Semisom 2100/80 T**
- **Semisom 1200/80 T**

power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	min. suction level (mm)	outlet Ø	code
2600	3~400	8,1	84	8,7	275	3"	132895
4100	3~400	9,2	60	16,5	275	3"	132805
5500	3~400	12	96	18,3	275	3"	132845
7500	3~400	16	120	20,1	275	3"	132885
7500	3~400	16	72	25,7	275	3"	132865

Passing through Ø 74 mm - Includes 10 m cable.





- Fork hook**
- Foot pad***
- Discharge flange**

code
455028
455029
455035



For non automatic pumps: level switches, see page 476



Grinder dirty water pumps




- **Semisom 125 GR M aut.***
- **Semisom 125 GR M***
- **Semisom 125 GR T**
- **Semisom 300 GR M aut.***
- **Semisom 300 GR M***
- **Semisom 300 GR T**

power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	code
1800	1~230	9,2	6,6	27,5	132013
1800	1~230	9,2	6,6	27,5	132014
1500	3~400	2,9	6,6	27,5	132015
1180	1~230	9,2	16	21	132016
1180	1~230	9,2	16	21	132017
1500	3~400	2,9	16	21	132018

Includes 10 m cable.

* Includes starting panel.




Well pumps



- **Turbosom 57 M***
- **Turbosom 77 M***
- **Turbosom 77 T**

power supply (W)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	max. submersion depth (m)	pump Ø (mm)	outlet Ø	code
550	1~230	2,4	60	10	136	F 1"	151020
750	1~230	2,4	84	10	136	F 1"	151030
750	3~400	2,4	85	10	136	F 1"	151035

Supplied with 15 m cable and 15 m rope.



- **SRM 4/100 automatic***
- **SRM 4/100 M***
- **SRM 6/100 automatic***
- **SRM 6/100 M***
- **SRT 6/100 T**
- **SRM 7/100 automatic***
- **SRM 7/100 M***
- **SRT 7/100 T**

power supply (W)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	max. submersion depth (m)	pump Ø (mm)	outlet Ø	code
650	1~230	6	46	30	130	F 1"1/4	150603
650	1~230	6	46	30	130	F 1"1/4	150602
950	1~230	6	69	30	130	F 1"1/4	150609
950	1~230	6	69	30	130	F 1"1/4	150608
950	3~400	6	69	30	130	F 1"1/4	150610
1200	1~230	6	80	30	130	F 1"1/4	150612
1200	1~230	6	80	30	130	F 1"1/4	150611
1200	3~400	6	80	30	130	F 1"1/4	150613

Supplied with 15 m cable and 15 m rope.

* Includes starting panel.



Liquid transfer pumps

For clear water, salty water, wine, vinegar, milk.



BE - M 20
BE - M 25
BE - M 30
BE - T 30
BE - M 40
BE - T 40
BE - M 50
BE - T 50

	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (l/min)	max. height (m)	code
BE - M 20	340	1~230	1,8	27	20	093020
BE - M 25	710	1~230	3,3	40	14	093025
BE - M 30	800	1~230	3,7	76	14	093030
BE - T 30	800	3~400	1,5	76	14	093035
BE - M 40	950	1~230	4	116	20	093040
BE - T 40	1000	3~400	3	116	20	093045
BE - M 50	2100	1~230	11	202	24	093050
BE - T 50	1900	3~400	5,1	202	24	093055



Marina 20 - 12V
Marina 20 - 24V
Marina 25 - 24V

	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (l/min)	max. height (m)	code
Marina 20 - 12V	350	12V DC	25	27	18	093070
Marina 20 - 24V	350	24V DC	13	27	18	093080
Marina 25 - 24V	380	24V DC	15	40	14	093085

Novax - 20B
Novax - 30B

	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (l/min)	max. height (m)	code
Novax - 20B	340	1~230	1,8	27	20	093058
Novax - 30B	800	1~230	3,7	76	14	093060


Drill 20 for drilling machine

With strainer basket.

code
093100

Jung® pumps

PENTAIR
JUNG PUMPEN



Simer 5

	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	outlet Ø	code
Simer 5	190	1-230	0,5	4,3	6	F 1"1/4	132600


For complete drying surface - Residual water level 2 mm - Includes 10 m cable & multidiameter fitting (13/19/25 mm).



Level control

For Simer 5 pump, min. 7 mm water level.


code
131230



UV 315-1
UV 315-3 T
UV 315-1-S automatic

	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	outlet Ø	code
UV 315-1	1360	1-230	8,2	28	13,5	F 1"1/2	131195
UV 315-3 T	1450	3-400	3,6	29	13,5	F 1"1/2	131196
UV 315-1-S automatic	1360	1-230	8,2	28	13,5	F 1"1/2	131197

Passing through Ø 10 mm - Includes 10 m cable.



UV 620-1
UV 620-1 S automatic
UV 620-3
UV 625-3
UV 635-3

	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	outlet Ø	code
UV 620-1	1650	1-230	10,4	36	16	F 2"	131201JE
UV 620-1 S automatic	1650	1-230	10,4	36	16	F 2"	131202JE
UV 620-3	1950	3-400	4,6	37	18	F 2"	131203JE
UV 625-3	2280	3-400	5,2	38	20	F 2"	131204
UV 635-3	3250	3-400	6,2	39	24	F 2"	131205

Passing through Ø 10 mm - Includes 10 m cable.

Compact lifting stations



Hot water

Adjustable outlet orientation - Built-in check valve - Hot water up to 80°C - Alarm as an option - 1"1/2 female threaded outlet - US 73 HES pump (code 131840), 0,5 kW, 3,9 A, passing through Ø 30 mm, level switch, 10 m cable.

	max. flow (m³/h)	max. height (m)	code
Hebefix 100 H	10	9	131179



Dirty water & condensates

Acc. to EN 12050-1 - Compact - Ready for installation - Easy maintenance - Silent - Dirt rinsing device - Timer with sound alarm - High quality ABS tank - Compatible for water with 10% salt - Dimensions (mm): L 320 x W 176 x H 135 - Max. temperature: 55°C.

	max. flow (m³/h)	max. height (m)	code
Hebefix Mini	5	4,3	131181



Aggressive fluids

Acc. to EN 12050-1 - Compact - Ready for installation - Easy maintenance - Silent - Dirt rinsing device - Timer with sound alarm - High quality ABS tank - Compatible for water with 10% salt - Outlet 1"1/4 with built-in check valve.

	max. flow (m³/h)	max. height (m)	code
Hebefix Extra	5	5	131180



Condensates

Acc. to EN 12050-1 - For condensates pH > 2,7 - Timer with sound alarm - Built-in check valve - Outlet pipe 6 m & Ø 12 - Max. temperature: 40°C.

	max. flow (l/h)	max. height (m)	code
K2 Plus	520	3,5	131190



Sewage & dirty water

Compact - Ready for installation - Submersible - Vertical/horizontal additional inlets - Check valve - PE tank - Vortex impeller.

	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	outlet Ø	tank (l)	code
Compli 310E	980	1-230	4,5	30	6	80	50	131220



Compli 300E

	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	outlet Ø	tank (l)	code
	980	1-230	6	30	7	80	50	131221

Outlet pipe DN 80 - Includes control panel with alarm & 4 m cable.




Compli 400E

	power supply (W)	voltage (V-50Hz)	amp. (A)	max. flow (m³/h)	max. height (m)	outlet Ø	tank (l)	code
	1100	1-230	7,1	48	6	80	64	131222

Adjustable flanges (180 or 250 mm inlet height) - Outlet pipe DN 100 - Includes control panel with alarm & 4 m cable.

Other types on request. Please consult.

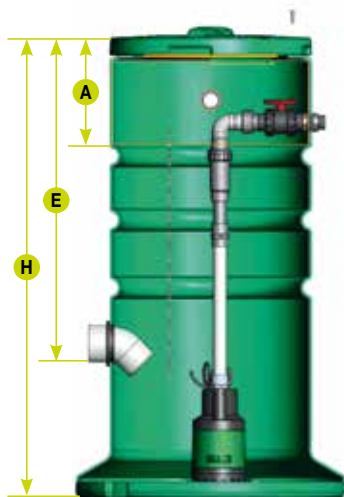

Wastewater lifting stations

Acc. to EN 12050-2.

Complete set for wastewater (after wastewater tank or sand filter)

Ø 600 underground installation high density polyethylene tank - 1/4 turn closing cover - Nova-up 600 pump, 1~230V-50Hz, passing through Ø 10 mm - 100 mm PVC inlet, 1"1/4 male threaded outlet, 50 mm PVC aerator, 50 mm PVC wire outlet - Check valve - 1"1/4 ball valve.



	tank (l)	H (mm)	E (mm)	A (mm)	max. flow (m³/h)	max. height (m)	code
Altibox CE 650/600	170	650	200	175	9	13,8	131550
Altibox CE 850/600	210	850	400	270	9	13,8	131551
Altibox CE 1100/600	300	1100	660	270	9	13,8	131552
Altibox CE 1400/600	360	1400	950	270	9	13,8	131553
Altibox CE 1850/600*	480	1850	1400	270	9	13,8	131554
Altibox CE 2500/600*	650	2500	2050	270	9	13,8	131555

* please consult for specific freight charges



Outlet flexible hose 1"1/4

code

453135



Extension for Altibox 600

300 mm height.

code

452998



Sawing set DN100

Includes hole saw, gasket & cap.

code

453067



Bipolar tight connection

2 poles - Screws connections - 23x66 mm - 32 A - Max. 450V - Wire 7 to 12 mm - IP68.

connections

code

2 (level switch)

432202

3 (1~230V pump)

432203

4 (3~400V pump)

432204



Tight connection set

For tight connection up to 5 connectors 1,5 to 6 mm² - IP68.

code

432106



Complete set for wastewater

Not for sewage & dirty water (toilets, etc...) - 30 l tank - Nova 300R automatic pump, 1~230V-50Hz, max. particles 5 mm - Float valve - Check valve - Dimensions (mm): L 408 x W 310 x H 360.

	power supply (W)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	tank (l)	code
Novabox 30/300R	220	1~230	12	7,1	30	131453

Sewage & dirty water lifting stations

Acc. to EN 12050-1.

Indoor & outdoor installation

1 pump - 150 l tank

Underground installation 150 l polyethylene tank - 1/4 turn closing cover - 100 mm PVC inlet, 63 mm PVC outlet, 50 mm PVC wire outlet, 2 gland packs - Dimensions (mm): L 729 x W 622 x H 650 - Domosom 270 automatic, 1~230V-50Hz, with Vortex impeller, 10 m wire, passing through Ø 50 mm - 1 mounted 2" PVC ball check valve.

	power supply (W)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	tank (l)	code
Domobox 150/270 M automatic	550	1~230	24	8,5	150	144055

1 pump - 270 l tank

Underground installation 270 l polyethylene tank - 12 screws closing cover - Composite guide bar device - 100 mm PVC inlet, 63 mm PVC outlet, 50 mm PVC aerator, 50 mm PVC wire outlet, 2 gland packs - Dimensions (mm): L 800 x W 640 x H 940 - Semisom 290 automatic or 490 automatic pump, 1~230V-50Hz, with Vortex impeller, 10 m wire, passing through Ø 50 mm - 1 mounted 2" PVC ball check valve.

	power supply (W)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	tank (l)	code
Fekafos DSD 270 PP/290 automatic	550	1~230	12	8	270	145010
Fekafos DSD 270 PP/490 automatic	550	1~230	29	10	270	145011

Extension for Fekafos

Includes bolts & screws.

height (mm)	code
300	453018

Outdoor installation

Underground installation 270 l polyethylene tank - Ø 585 mm cover - 1/4 turn cover - Screws locking - Composite guide bar device - Foot peg welding without drilling - 2" cast iron check valve, 2" PVC valve - 180° inlet water from 200 to 500 mm, thanks to supplied drilling set - 100 mm PVC inlet, 63 mm PVC outlet, 50 mm PVC aerator, wire outlet - Dimensions (mm): L 785 x W 590 x H 1025 - Semisom 290 automatic or 490 automatic pump, 1~230V-50Hz, with Vortex impeller, 10 m wire & control panel, passing through Ø 50 mm.

	power supply (W)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	tank (l)	code
Fekafos Enter 271 PP/290 automatic	550	1~230	12	8	270	145000
Fekafos Enter 271 PP/490 automatic	1100	1~230	29	10	270	145001

Accessories

Extension for Domobox & Fekafos Enter

height (mm)	code
200	452991
400	452992

Anti-smell cartridge

For lifting stations & septic tanks - 100 mm diameter - Bad smells remover & hydrogen sulphide filter.

code
550400

Sawing set DN110

Includes Ø 114 mm hole saw, Ø 110 PVC elbow & gasket.

code
412619

Connection set PVC 110/100

Includes FF Ø 110 nipple, M Ø 110 - F Ø 100 reduced nipple & 110 mm PVC Ø 100.

code
453117



■ Toilet macerators



According to EN 12050-3 - IP44 - Connection set for outlet 22 to 40 mm - Tank adapted to 4,6 to 9 l water volume - Easy maintenance & access to motor, pump, macerator & pressure switch - Silent - Power supply 490 W - 1~230V-50Hz - 2,3 A - Max. flow 115 l/min - Max. height 8 mm - Includes check valve - Dimensions (mm): L 456 x l 178 x H 352.



Genix 110

For 1 WC + 1 sink.

Genix 110 comfort*

* Lower sound rating: less than 60 dB.

code

131460

131461

Genix 130

For 1 WC + 1 sink + 1 shower + 1 bidet.

Genix 130 comfort*

* Lower sound rating: less than 60 dB.

code

131462

131463

Connection set

Includes 500 mm pipe, gear clamp & fitting.

code

451021

■ Greases separators

Restaurants & collective use - According to EN 1825-1 - High density polyethylene tank - Tight polyethylene cover - Ø 620 mm cover - 110 mm PVC inlet & outlet - Underground & above ground installation.



	max. meals/day		flow	separator	sludge trap	dimensions	code
	restaurant	canteen	(l/s)	volume (l)	volume (l)	(mm)	
YGO500E	100	220	1	240	100	L 1000 x W 1000 x H 1000	457340
YGO501E	150	330	1,5	510	150	L 1200 x W 1200 x H 1230	457660
YGO502E	200	440	2	490	200	L 1200 x W 1200 x H 1230	457690

code

Extension 200 mm

453026

Extension 400 mm

453027

■ Greases separators - Above ground installation

Restaurants & collective use - According to EN 1825-1 - High density polyethylene tank - Tight polyethylene cover - Ø 620 mm cover - 110 mm PVC inlet & outlet - 50 mm cable inlet for alarm installation - 80 mm PVC drainage outlet, symmetrical fitting & 110 mm PVC air vent for HG1002E & HG1004E.



	max. meals/day		flow	separator	sludge trap	dimensions	code
	restaurant	canteen	(l/s)	volume (l)	volume (l)	(mm)	
HG0502E	209	443	2	480	200	L 1635 x W 770 x H 1090	457350
HG1002E	209	443	2	480	200	L 1635 x W 770 x H 1090	457351
HG0504E	417	886	4	1200	400	L 1635 x W 770 x H 1090	457355
HG1004E	417	886	4	1200	400	L 1635 x W 770 x H 1090	457356

■ Greases separators - Dishwashing

Restaurants & collective use.

GM1 E

High density polyethylene tank - PVC inlet & outlet - Tight polyethylene cover - Stainless steel screws - 55 l volume - Max. flow 0,75 l/s - Dimension (mm): L 600 x W 435 x H 450.

code

456517



code

Drainage valve

For polyethylene separator.

658450

Restaurants & collective use - Stainless steel tank & cover - 2 drainage valves - 1 outlet valve - 4 adjustable feet (100 mm).



	meals/service	connected sinks	volume (l)	dimensions (mm)	code
MINIGR-040	1 to 40	1	39	L 480 x W 350 x H 484	456604
MINIGR-060	41 to 60	1 to 2	53	L 540 x W 350 x H 534	456606
MINIGR-080	61 to 80	1 to 3	67	L 640 x W 350 x H 574	456608
MINIGR-100	81 to 100	1 to 3	82	L 730 x W 350 x H 594	456610

Membrane tanks



2-year guarantee - CE certification acc. to 2014/68/EU Directive - Pre-set pressure: 2 bar - Temperature: -10°C to +90°C - Food quality & safety membrane.



Standard

volume (l)	type	max. pressure (bar)	Ø connection M	height (mm)	length (mm)	Ø tank (mm)	code
5	V	10	1"	320		160	301005JE
8	V	10	1"	335		200	302008JE
19	V	10	1"	410		270	301019
20	V	10	1"	495		250	301020
24	V	10	1"	340		350	301024



5 to 19 l



24 l



H: horizontal



V: vertical

volume (l)	type	max. pressure (bar)	Ø connection M	height (mm)	length (mm)	Ø tank (mm)	code
20	H	10	1"		500	250	303020
40	H	10	1"		560	345	303040
60	V	10	1"	815		380	309060
60	H	10	1"		650	380	309061
80	V	10	1"	790		450	309080
80	H	10	1"		640	450	309081
100	V	10	1/2" & 1"	910		450	309100
100	H	10	1/2" & 1"		750	450	309101
200	V	10	1/2" & 1 1/2"	1215		554	309200
200	H	10	1/2" & 1 1/2"		1020	554	309201
300	V	10	1/2" & 1 1/2"	1375		625	309300
300	H	10	1/2" & 1 1/2"		1190	625	309301
500	V	10	1/2" & 1 1/2"	1460		775	309500
750*	V	10	1/2" & 1 1/2"	1925		790	309750
1000*	V	10	1/2" & 2"	1915		935	309900

* please consult for specific freight charges

High pressure

volume (l)	type	max. pressure (bar)	Ø connection M	height (mm)	Ø tank (mm)	code
20	V	16	1"	485	250	308020
100	V	16	1/2" & 1"	915	464	309103
200	V	16	1/2" & 1 1/2"	1220	556	309203
300	V	14	1/2" & 1 1/2"	1370	626	309303
495	V	12	1/2" & 1 1/2"	1461	777	309503

Membranes on request



20 l



100 l to 495 l

Diaphragm tanks



5-year guarantee - No maintenance required - CE certification acc. to 2014/68/EU Directive - Double layer - Stainless steel connections - Pre-set pressure: 2 bar - Temperature: -10°C to +99°C.



volume (l)	type	max. pressure (bar)	Ø connection M	height (mm)	length (mm)	code
19	V	10	1"	450	250	304019
19	V	16	1"	450	250	304018
24	V	10	1"	450	250	304024
40	V	10	1"	450	380	304040
20	H	10	1"	280	490	304021
60	H	10	1"	430	430	304061
100	H	10	1"	485	485	304101
60	V	10	1"	780	380	304060
100	V	16	1"	840	450	304100
140	V	16	1"	1070	450	304140
200	V	10	1"	1150	554	304200
280	V	10	1"	1250	624	304280
430	V	10	1 1/4"	1580	630	304430



19 l to 40 l



20 l to 100 l



60 l to 280 l

NEW

Diaphragm tanks



5-year guarantee - No maintenance required - CE certification acc. to 2014/68/EU Directive.



Challenger

Max. temperature: 90°C - Stainless steel 316 connections.



volume (l)	type	max. pressure (bar)	Ø connection M	height (mm)	length (mm)	code
8	V	10	1"	315	200	305008JE
18	V	10	1"	370	280	305018
18	V	16	1"	370	280	305019
24	V	10	1"	440	290	306024


Pre-set: 1,9 bar.



H: horizontal

volume (l)	type	max. pressure (bar)	Ø connection M	height (mm)	length (mm)	code
20	H	10	1"	290	440	305020
60	H	10	1"	410	530	305060
80	H	10	1"	425	730	305080
100	H	10	1"	480	720	305101

Pre-set: 1,9 bar.



V: vertical

volume (l)	type	max. pressure (bar)	Ø connection M	height (mm)	length (mm)	code
60	V	10	1"	620	390	305059
80	V	10	1"	815	390	305079
100	V	10	1"	805	430	305100
150	V	10	1"	820	530	305150
200*	V	10	1" 1/4	1034	534	306201
240*	V	10	1" 1/4	1201	534	306240
310*	V	10	1" 1/4	1488	534	306310
450*	V	10	1" 1/4	1505	660	306450

Pre-set: 1,9 bar; except * 2,6 bar.




C2-Lite

Fiberglass tank: light weight - Max. temperature: 50°C.

volume (l)	type	max. pressure (bar)	Ø connection M	height (mm)	weight (kg)	code
60	V	8,6	1"	950	9	318060
100	V	8,6	1"	980	12	318100
130	V	8,6	1"	1241	15	318130
250	V	8,6	1" 1/4	1355	25	318250
350	V	8,6	1" 1/4	1448	33	318350
450	V	8,6	1" 1/4	1831	37	318450

Pre-set: 1,4 bar.

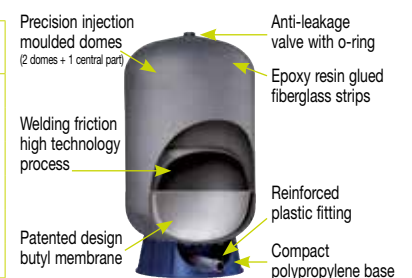

AWB

All weather for outdoor installation - Carbon steel tank with polypropylene shell - Stainless steel connection.



volume (l)	type	max. pressure (bar)	Ø connection M	height (mm)	length (mm)	code
18	V	10	3/4"	425	276	318018
24	V	10	1"	454	301	318024

Pre-set: 1,9 bar.



Manometers - Dry - ABS plastic box

Acc. to EN837-1 - Temperature range: -20°C/+60°C - Brass connection - Acrylic glass - IP43 - Class 2,5.

Ø 50 - Axial



pressure (bar)	Ø connection	code
0 - 6	1/4"	413006JE
0 - 10	1/4"	413010

Ø 50 - Radial



pressure (bar)	Ø connection	code
0 - 6	1/4"	413106
0 - 10	1/4"	413110JE

Other pressure settings & Ø, see page 402

Manometers - Glycerin filled - Stainless steel box

Acc. to EN837-1 - Temperature range: -20°C/+60°C - Brass connection - Plexiglass glass - IP65 - Safety vent - Class 1,6.

Ø 50 - Axial



pressure (bar)	Ø connection	code
0 - 2,5	1/4"	413203
0 - 6	1/4"	413206
0 - 10	1/4"	413210
0 - 16	1/4"	413216

Ø 50 - Radial



pressure (bar)	Ø connection	code
0 - 2,5	1/4"	413303
0 - 6	1/4"	413306
0 - 10	1/4"	413310
0 - 16	1/4"	413316

Ø 63 - Axial



pressure (bar)	Ø connection	code
0 - 2,5	1/4"	413403
0 - 6	1/4"	413406
0 - 10	1/4"	413410
0 - 16	1/4"	413416
0 - 25	1/4"	413425

Ø 63 - Radial



pressure (bar)	Ø connection	code
0 - 2,5	1/4"	413503
0 - 6	1/4"	413506
0 - 10	1/4"	413510
0 - 16	1/4"	413516
0 - 25	1/4"	413525

Other pressure settings & Ø, see page 402

Manometer holder valves



Ø	pack	code
1/4"	50	ZRI08
3/8"	50	ZRI12
1/2"	25	ZRI15



Ø	code
1/4"	1306002
3/8"	1306003
1/2"	1306004



Ø	code
1/4"	9880302
1/2"	9880304

Pressure controllers



Manotroll 0-10 bar

For network - Ø 63 mm - Class 1,6 - Brass material in contact with the fluid - ABS plastic box - Max. pressure indicator - 3/4" threaded fitting & 1" adaptor.

code
411040

Vazpress 0-4 bar

For pressurised tank - Ø 50 mm - Class 2,5 - Brass material in contact with the fluid - ABS plastic box with protection - Needle valve for unflating - 15 cm flexible hose with quick valve fitting.

code
411041

Dom set 7 m - Ø 22

For network - Ø 50 mm - Class 2,5 - Brass material in contact with the fluid - Stainless steel box with protection - For 8 to 20 mm holes - Pressure ranges colour marking - Max. temperature: 60°C.

code
411042

Connection set

Connection set GC

Includes flexible hose 500 mm - 1", 5-way fitting, pressure switch XMP 6 PM, manometer 0-6 radial, teflon roll.

code
455090



Pressure switches



Standard

ΔP adjustable - Pre-set: 1,4 to 2,8 bar - Fitting F 1/4" - 230V 16A.

code

003170



Standard + wire

Pre-set: 2 to 3,5 bar - Fitting F 1/4" - Supplied with wire - 230V 16A.

code

003121



XMP 6 bipolar

Max. pressure: 6 bar - Min. ΔP: 0,6 bar - Pre-set: 1,4 to 2,8 bar - Max. power: 1,5 kW (for 1-230V) - Fitting F 1/4" - Temperature: 0 to 70°C - Wired with standard take-off.

code

412500

NEW

XMP 6 wired bipolar

Same as XMP 6 bipolar, except: wired included.

412504



XMP 6 PM bi/tripolar

Max. pressure: 6 bar - Min. ΔP: 0,6 bar - Pre-set: 2 to 3,5 bar - Max. power: 3 kW (for 3-400V) - Fitting F 1/2" - Manometer outlet F 1/4" - Temperature: 0 to 70°C.

code

412506

XMP 12 PM bi/tripolar

Same as XMP 6 PM, except: max. pressure: 12 bar, min. ΔP: 1 bar, pre-set: 4 to 6 bar.

412512



XMX Reversed with manometer inlet

Lack of water switch-off device - Pre-set: 0,5 to 1,5 bar - Usable only with remote control - Fitting F 1/2" - Manometer outlet F 1/4" - Temperature: 0 to 70°C - Max. pressure: 6 bar.

code

412560



69 WEC bipolar with switch & lack of water protection

Max. pressure: 4,5 bar - Min. ΔP: 0,9 bar - Pre-set: 1,3 to 2,6 bar - Max. power: 1,1 kW (for 1-230V) - Fitting F 1/4" - Low pressure (0,4 bar) switch-off device.

code

412550



69 WR3 Reversed

Lack of pressure switch-off device - Pre-set: 0,3 to 0,7 bar - Max. power: 1,5 kW (for 1-230V) - Fitting F 1/4".

code

412552



MCS 11 Universal unipolar

Lack of water switch-off device - Pre-set: 0,2 to 0,5 bar - Usable only with remote control - Fitting F 1/4" - Temperature: -25°C to 80°C - Max. pressure: 11 bar - Protection IP55.

code

410501

MCS 22

Same as MCS 11, except max. pressure: 22 bar.

410502



ELT

Pressure setting: -0,2 - 8 bar - Differential pressure: 0,6 - 3 bar.
Pressure setting: 5 - 16 bar - Differential pressure: 1 - 3,5 bar.
Pressure setting: 5 - 28 bar - Differential pressure: 2 - 10 bar.

code

132001SE

132002SE

132003

More information page 214

Level switches

With neoprene wire.



Bip Stop VS 2 threads + special earth connection

Drainage use - Differential angle 110° - All directions use -
Fluid density 0,60 to 1,15 - Max. pressure: 5 bar - Max.
temperature: 85°C - 135 x 70 mm - Elec.: 20 (8) A 250V -
Protection IP68 - Includes socket male/female.

code
5 m 411260
10 m 411265
20 m 411270

TM-Red 3 threads

Drainage or filling use - Elec.: 10 (4) A 250V -
Direct start 1,1 kW single phase - Max. temperature: 50°C -
105 x 54 x 120 mm.

code
5 m 411525
10 m 411530
20 m 411535

Microstart VR

Drainage or filling use - Elec.: 20 (8) A 250V - 3 threads -
Max. pressure: 10 bar - Max. temperature: 55°C - 142 x 80 mm -
Differential angle 60° - Protection IP68.

code
5 m 411105
10 m 411110
20 m 411120

Counter-weight

275 g.

code
411595

Adjustable ballast

Resin - 175 g - Includes blocking fitting.

code
411585

Cable hook

code
411590

Level monitors

With neoprene wire - 2 monitors needed for automatic control - All directions use -
To be used with control panel for drainage & filling.



Meca Small Ecolo

Elec.: 16 (6) A 250V - 130 x 70 mm - Max. temperature: 70°C -
Differential angle 25°.

code
5 m 411405
10 m 411410
20 m 411420

Meca Ecolo

Elec.: 16 (6) A 250V - 5 waterproof compartments -
170 x 80 mm - Max. temperature: 70°C - Differential angle 25°.

code
5 m 411705
10 m 411710
20 m 411720

Soba Tech

Very dirty water use - 152 x 95 mm - Max. temperature: 70°C -
Without ballast - Differential angle 25°.

code
5 m 411905
10 m 411910
20 m 411920

Meca Ecolo "All Hypalon"

Use: liquid with oil, hydrocarbures, chlore, some acids, alcalines,
etc... - Elec.: 16 (6) A 250V - 5 waterproof compartments -
200 x 92 mm - Max. temperature: 95°C - Differential angle 25°.

code
5 m 411725
10 m 411735
20 m 411745

IFB Blue 3 threads

Lifting stations use - Wire A05 VV-F - Temperature: 55°C -
10 A 250V - Differential angle 10°.


code
5 m 412605
10 m 412610
15 m 412615
20 m 412620

IFB compact

Same as IFB Blue 3 threads, except smaller dimensions for
compact volume.

code
10 m 413610

Level detectors



Tuba Ecolo 1"

Neoprene wire - 8 (4) A 250V - 160 x 25 mm -
Differential angle 10°.

code
5 m 405005
10 m 405010

Tuba Ecolo 1 1/4"

Neoprene wire - 12 (4) A 250V - 160 x 36 mm -
Differential angle 20°.

code
5 m 411815
10 m 411820

Motor protection & level monitoring for 1~230V & 3~400V pumps - 6 modes: 1 electrode, 2 electrodes, without protection, reversed pressure switch, pulse meter.



DSN 61 control panel

With contactor up to 12A.
With contactor up to 18A.

code

471261
471263



Sound alarm set

With contactor up to 12A.

code

471699



DSN electrode Stainless steel electrode Cable*

For electrode - 1 x 1,5 mm² - Food quality & safety.

code

414000
414010
431600

* price/meter.



Sound alarm Sound alarm with 36 hours running reserve

Noise intensity 90 dB - 1~230V.

code

471701
471702



Superclick tight connection set

IPX8 - Reticulated polymere gel - Max. wire
Ø 14 mm - Connectors 1,5 to 6 mm².

connectors	Ø cable	code
3	14	432120
5	20	432121

Pipes & fittings



Flat discharge pipe

PVC pipe.

length (m)	Ø pipe	code
10	25	005110
25	25	562525
10	30	005111
25	32	562532
25	40	562540
25	50	562550



Flat discharge set

PVC pipe - 2" camlock fitting -
Male or female nipple to be mounted on the pump.

length (m)	Ø pipe	code
10	50	454509



Flat discharge pipe & fittings

PVC pipe - Symmetrical fittings at both ends -
Temperature: -10°C to 60°C - Pressure 8 bar at 20°C.

length (m)	Ø pipe	code
10	32	454507
20	32	454517
10	40	454508
20	40	454518
10	50	454510
15	50	454515
10	80	454511



Discharge set

For outlet Ø 53/63 - Bore 50 - Includes check ball valve, fitting MM 2",
PVC ball valve with full bore & 2 end fittings.

code

455010

Valve set

Same as discharge set but without check ball valve.

code

455011



PVC check ball valve

Threaded FF - Max. pressure: 10 bar - PVC body & ball -
Max. temperature: 60°C.

Ø	code
1"1/4	334007
1"1/2	334008
2"	334009
2"1/2	334010
3"	334011



Anti-smell cartridge

For lifting stations & septic tanks - 100 mm diameter - Bad smells
remover & hydrogen sulphide filter.

code

550400

Filtration pumps



Pallet of 28 pcs



SPR 300

For aboveground pool (10 to 20 m³).

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	code
300	0,5	1-230	7	8	002960

Pallet of 28 pcs



SPR 500

For 20 to 30 m³ pool.

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	code
500	0,7	1-230	10	11	002961

Pallet of 28 pcs



SPR 800

For 25 to 50 m³ pool.

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	code
800	1	1-230	15	13,5	002962


Pallet of 28 pcs



SPR 1100

For 35 to 80 m³ pool.

power supply (W)	power supply (hp)	voltage (V-50Hz)	max. flow (m³/h)	max. height (m)	code
1100	1,5	1-230	22	16	002963

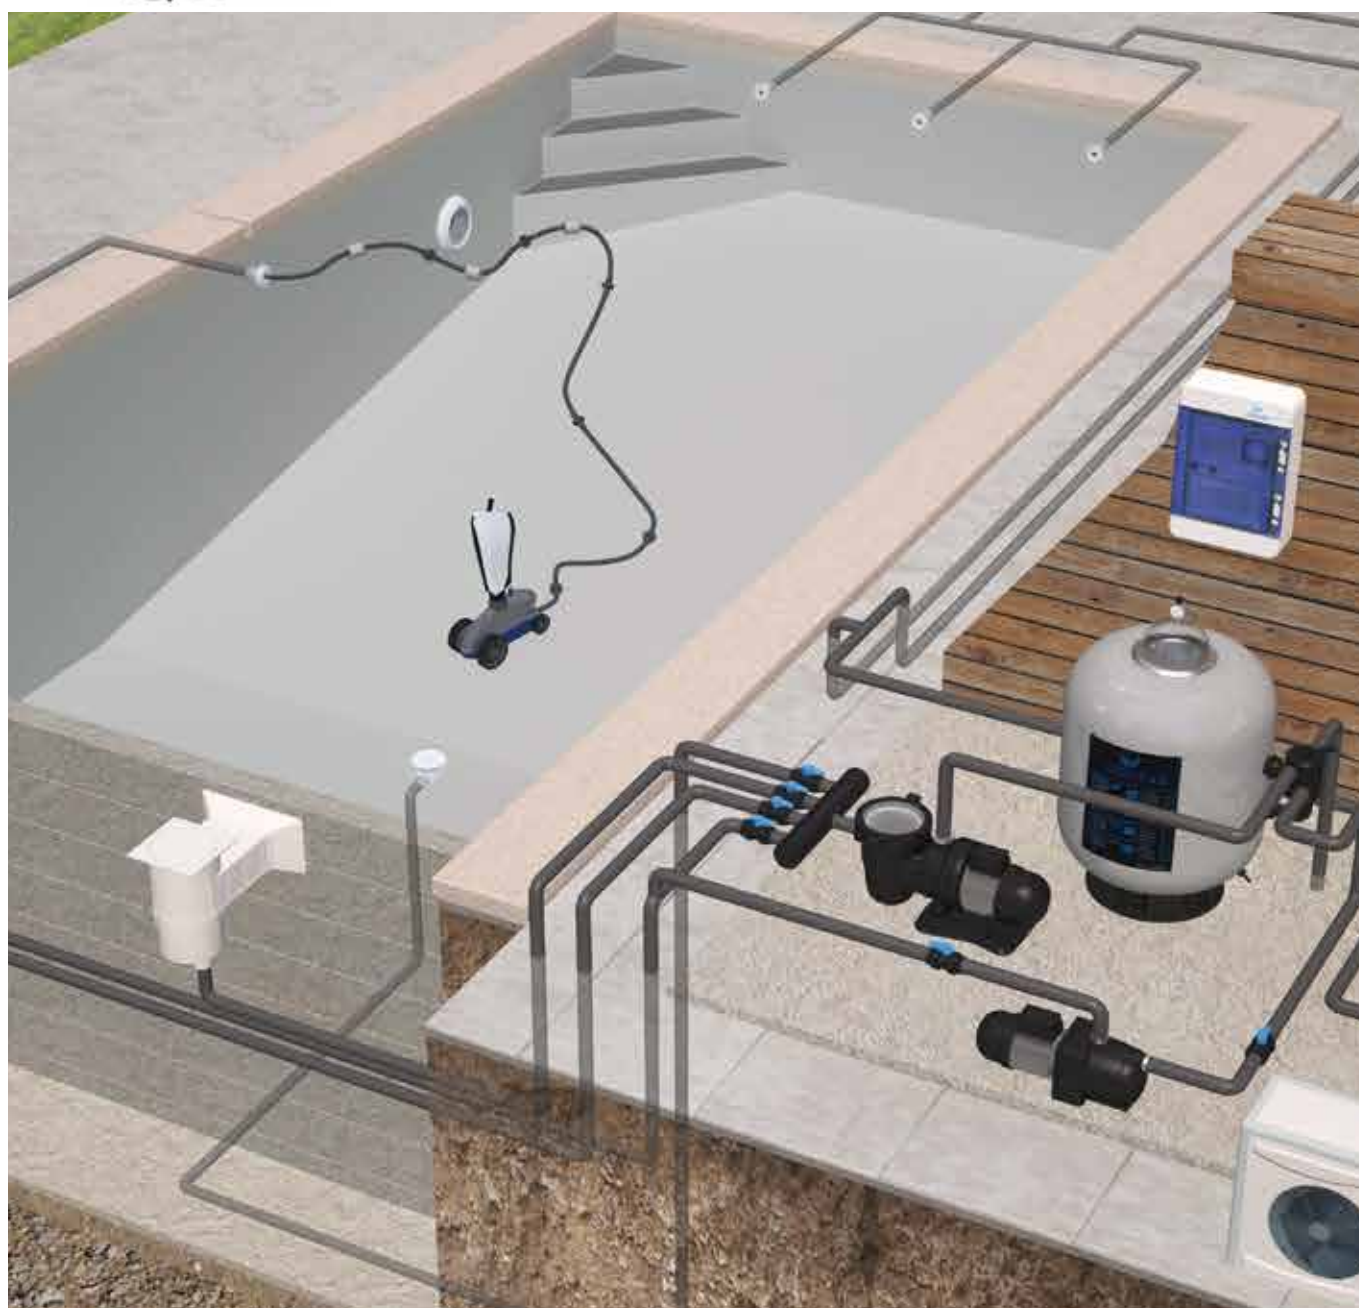

Filtration



Combo filter



	pool volume (m³)*	pump power supply (W/hp)	max flow (m³/h)	tank (l)	Aqualoon included (g)	code
Combo set	6-8	90 / 0,12	3,5	2	70	002939



Combo-S1



Combo-S2



Combo-4



Combo-6


	pool volume (m³)*	pump power supply (W/hp)	max flow (m³/h)	tank (l)	Aqualoon included (g)	code
Combo-S1	6-10	100 / 0,15	3	12,5	320	002940
Combo-S2	10-12	200 / 0,3	4	25	550	002941
Combo-4	12-15	200 / 0,3	4	25	640	002942
Combo-6**	20-25	450 / 0,6	6	25	800	002943
Combo-10***	30-35	600 / 0,8	10	50	1000	002944

Pipes Ø 1"1/4-1"1/2. Sold with Aqualoon, see below.

*capacity varies according to climate. **Includes prefilter. ***Includes prefilter + timer



Combo-10



Aqualoon recharge box 700g

Filter cartridge

3µ filtration polyethylene balls - Box of 700 g - Replaces sand: 700 g Aqualoon correspond to 25 kg sand - Advantages: light, less back-wash, less water consumption, chemical resistant, recyclable, non toxic.

Textile net.

code
002946
002948

PVC fittings

Reduced nipple



F1"1/4 - M1"
F1"1/2 - M1"1/4
F2" - M1"1/2
F2"1/2 - M2"

code
261200
261210
261220
261230

Fitting to be glued



F1"1/2 - M50 - F40
M1"1/2 - M50 - F40

code
261280
261290

Free nut nozzle



F1"1/4 - Ø 27 or 25
F1"1/2 - Ø 32 or 30
F2" - Ø 42 or 40
F2"1/4 - Ø 52 or 50


code
261240
261250
261260
261270

EPDM flat gasket



1"
1"1/4
1"1/2
2"
2"1/4

code
261300
261310
261320
261330
261350



Maintenance accessories

	Surface net		pack	code
			50	002970
	Depth net		pack	code
			8	002971
	Surface net	With 120 cm handle	pack	code
			12	002972
	Wall brush		pack	code
			48	002973
	Hand brush		pack	code
			56	002974
	Broom head		pack	code
			8	002975
	Telescopic handle	3 x 120 cm	pack	code
			10	002984
	Floating PE pipe	Ø 32 mm x 5 m Ø 38 mm x 8 m	pack	code
			3 2	002985 002986
	Cleaning set 5 pieces		pack	code
			8	002977
	Triangular suction head		pack	code
			7	002976
	Thermometer		pack	code
			100	002979
	pH/Chlorine measuring set		pack	code
			108	002980
	pH/Chlorine bottle		pack	code
			144	002981
	Small pebble diffuser		pack	code
			36	002982
	Big pebble diffuser		pack	code
			16	002983
	Sliceable PE pipe	Ø 32 mm x 15 m Ø 38 mm x 15 m	pack	code
			2 2	002987 002988

Filtration pumps



	power supply (hp)	flow (m³/h)	max. height (m)	1~230V (50Hz) code	3~400V (50Hz) code
Alfa	0,3	8	13	101071030	-
	0,5	11	14	101071050	-
	0,75	13,5	15	101071070	101071073
	1	18	16	101071100	101071103
	1,5	21	19	101071150	101071153
	2	24	20	101071200	101071203
	3	29	22	101071300	101071303



	power supply (hp)	flow (m³/h)	1~230V (50Hz) code
Alfa	3	5 to 30	101071999

Speed variation.



	power supply (hp)	flow (m³/h)	max. height (m)	1~230V (50Hz) code	3~400V (50Hz) code
KS	0,5	7,5	14	101001050	-
	0,75	11,5	16	101001070	101001073
	1	15,4	18	101001100	101001103
	1,5	21,5	18	101001150	101001153
	2	25,7	18	101001200	101001203
	3	29,5	18	101001300	101001303



	power supply (hp)	flow (m³/h)	max. height (m)	1~230V (50Hz) code	3~400V (50Hz) code
Sta-Rite 5P6R Freshwater	0,75	14	16	101027070	101027073
	1	17	18	101027100	101027103
	1,5	23	19	101027150	101027153
	2	27	20	101027200	101027203
	3	32	23	101027300	101027303



Sta-Rite S5P2R Salty water	0,5	8	18	101026050	101026053
	0,75	12	18,5	101026070	101026073
	1	14	20	101026100	101026103
	1,5	18	22	101026150	101026153

Sta-Rite S5P2R Salty water	1,5	4 to 20	101026995
---------------------------------------	-----	---------	-----------

Speed variation.



	power supply (hp)	flow (m³/h)	1~230V (50Hz) code
Whisperflo® VS2	1,5	5 to 25	101021995

Speed variation.



	power supply (hp)	flow (m³/h)	max. height (m)	1~230V (50Hz) code	3~400V (50Hz) code
Super Pump® Pro	0,75	10	12,5	101031070	-
	1	12,5	14	101031100	101031103
	1,5	15,5	15,5	101031150	101031153
	2	19	19	101031200	101031203



	power supply (hp)	flow (m³/h)	max. height (m)	3~400V (50Hz) code
MGN 1450	2,5	32	12	101079253
	3	43	13	101079303
	4	56	15	101079403
	5	84	15	101079553
	7,5	107	15	101079753
	10	126	18	1010791003

Commercial use.

Filtration



Clean & Clear Plus

nominal flow (m³/h)	max. flow (m³/h)	filtration area (m²)	Ø filter (mm)	height (mm)	filter code	cartridge code
14	27,3	22,3	546	940	152021020	157021020
18	29,8	29,7	546	1 092	152021030	157021030
22	32	39	546	1 244	152021039	157021039
30	34	48,3	546	1 422	152021049	157021049

Reinforced fiberglass polypropylene tank - 20 µm filtration - Includes 4 cartridges & Ø 50 mm fitting.



Elit

flow (m³/h)	Ø filter (mm)	Ø valve (mm)	sand capacity (kg)	gravel capacity (kg)	Silverlooon® capacity (boxes)	code
6,3	400	1"1/2	50	15	1	151082400
10	510	1"1/2	75	25	1,5	151082510
15	620	1"1/2	100	50	3	151082620
16	620	2"	100	50	3	151082622
18	680	2"	125	72	3,5	151082680
22	750	2"	150	75	4	151082750
32	900	2"	225	100	please consult	151082900

Laminated polyester tank - Includes valve - Sand, gravel & fittings not included.



Eos

flow (m³/h)	Ø filter (mm)	Ø valve (mm)	sand capacity (kg)	gravel capacity (kg)	code
9	480	1"1/2	50	25	151021475
14	610	1"1/2	100	50	151021610
16	610	2"	100	50	151021612
22	760	2"	200	75	151021760
32	910	2"	250	100	151021910

One-piece fiberglass polyester tank - Includes valve - Sand, gravel & fittings not included.



Silverlooon®

3 µm filtration polyethylene balls with silver nano-particles - Box of 700 g - Replaces sand: 700 g Silverlooon® correspond to 25 kg sand - Advantages: light, less back-wash, less water consumption, chemicals resistant, recyclable, non toxic.

code

159095100



Retainer

Retains the balls during washing in filter without top diffuser.

code

159099015

Silverlooon® skimmer

Prefiltration & downstream filter medium protection - 10 ball basket.

code

1590905010

Water booster set



Jetcom

power supply (hp)	flow (m³/h)	max. height (m)	1~230V (50Hz) code	3~400V (50Hz) code
0,75	3,2	48	103011070	-
1	4,0	52	103011100	103011103

Water booster cleaner



Polaris 380 Polaris 280

Energy saving water booster - 3 venturi jets - Filtration bag - Supplied with 9 m pipe - Retain valve - Max. pool dimensions: 12 m x 7 m.

3/4 hp
1 hp

code

252061380

252061280

Hydraulic water cleaners



MX9 pro®

1 propeller - 2 fans - Min. pump power: 3/4 hp - Pre-programmed navigation system - Max. pool dimensions: 12 m x 6 m.

code

253061900



Aquanaut 250

Adjustable section with 3 interchangeable inlets - Leaf trap - V-Flex propeller - Supplied with 10 x 1 m pipes.

code

253031250



Drainage pump

Professional floating motor pump for quick pool emptying, maintenance & fire-fighting - Above 2 cm water suction - Immediate self-priming - Very high flow for long-range fire hose - Pool, river, lake, etc. - 4-stroke motor (Briggs & Stratton for 3,5 V; Kawasaki for 6V).

	power supply (hp)	flow (m³/h)	tank (l)	max. pressure (bar)	weight (kg)	operating time (mn)	code
Aquafast	3,5	42	0,85	1,7	21	40	108099035
	6,0	70,8	2	2,5	26	60	108099060
Red fire pipe	2" - 20 m - 2 symmetrical nozzles - Max. pressure 18 bar.						1070992052
Fire hose	With valve.						1070990001

Water treatment



Electrolyser with polarity reversal - "T" design self-cleaning cell & new technology mixed electrode - Roll-on cover power reduction mode - Up to 24 h over-chlorination mode - Salt range 2,5 to 4 g/l - Safety: salt rate too low & lake of water - Progressive polarity reversal: 2 to 16 h adjustable, depending on water hardness - Low mode & boost mode - Cell dimensions 295 mm x 86 mm x 140 mm - Cell max. pressure 2 bar - Cell max. flow 22 m3 or by-pass - Min. salt level 2,5 g/l - Recommended salt level in early season 4 to 5 g/l - Max. water temperature 40°C - Box dimension: 230 mm x 330 mm x 140 mm - Approx. total weight: 6 kg.

		code
AE Salt	10 g/h chlorine production - 50 m³.	502021040
	17 g/h chlorine production - 80 m³.	502021070
	23 g/h chlorine production - 110 m³.	502021100



Electrolyser with pH control - Built-in Bluetooth for smartphone or home automation control - Compatible with INDYGO filtration control panel - Chlorine production: manual or automatic with ORP set - pH dosing pump 2,4 l/h - Proportional pH control - Water temperature measuring - Automatic wintering at 15°C - LCD screen - Adjustable lack of water protection, salt level & cell defect - Supplied with 5 connection manifold, installation elements & temperature, salt & pH probes.

		code
AE Salt Duo	10 g/h chlorine production - 50 m³.	502022051
	17 g/h chlorine production - 80 m³.	502022081
	23 g/h chlorine production - 110 m³.	502022111



AE Salt Pro	REDOX option - Automatic control of chlorine production - Supplied with ORP probe, calibration solution & installation set.	502022004
--------------------	---	-----------

		code
RCA jack cable	For roll-on cover connection.	502592109

		code
Pool earth	Connection between water & earth.	Pipe Ø 50 mm 502592201
		Pipe Ø 63 mm 502592202

		code
Earth stake	Copper - 5 m.	502599101

Acid or base dosing pump - Adjustable pH display: 6,8-7,6 - Preset pH = 7 to 10 - Probe with preserving solution - Supplied with monitoring set.

		code
AE pH	Flow: 2,4 l/h - Max. pool volume: 160 m³.	504021110

		code
Flovil Classic	Ultra concentrated flocculent/clarifier - Blister with 9 tabs.	50114012
	Flocculent/clarifier for cloudy water - Box with 12 tabs.	50114031

In-line dosing device for chlorine pebbles only - 1 month duration treatment - Includes control valve - ⚠ No chlorine shock product, no powder product.


		code
In-line dosing device	450 x 127 mm - Connection 50 mm - Max. pool volume 90 m³.	503040502
	390 x 206 mm - Connection 1"1/2 - Max. pool volume 150 m³.	503010504




Home automation filtration control

indygo


Filtration control panel connection

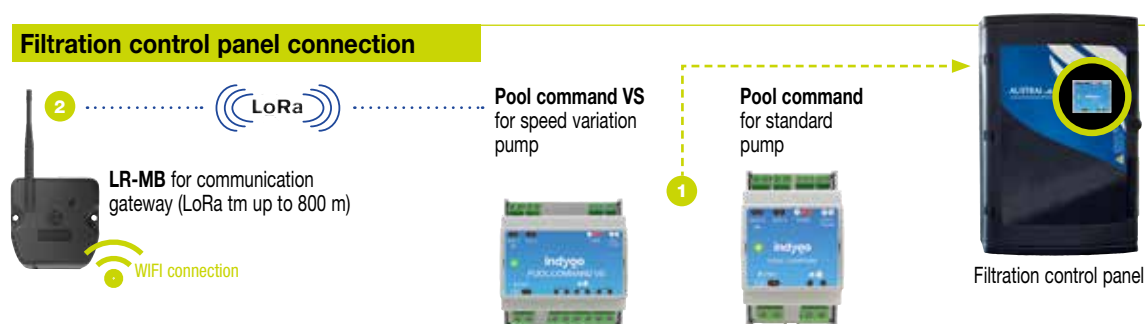

Water quality reading

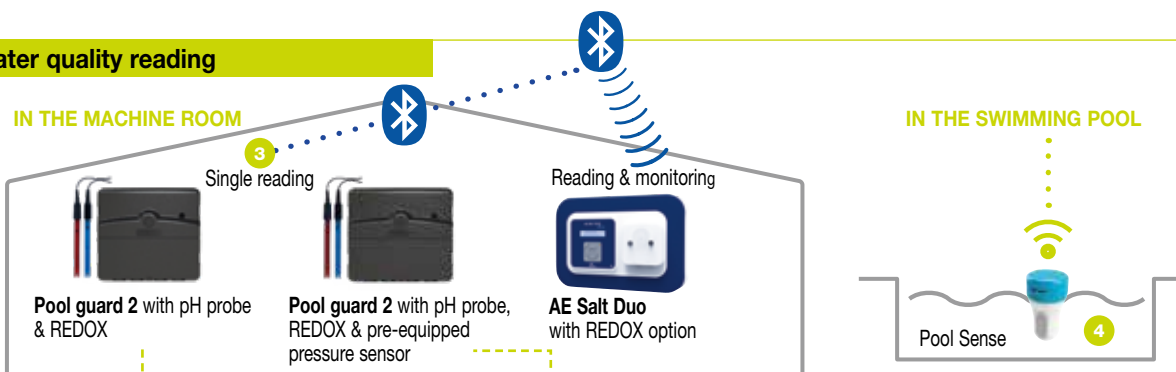

Pressure parameters reading

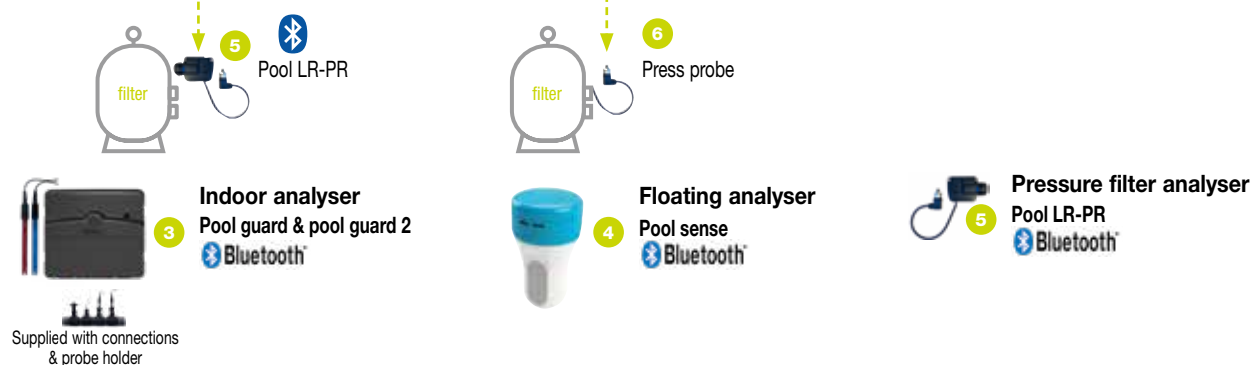

Electrolyser with pH control - Built-in Bluetooth for smartphone or home automation control - Compatible with INDYGO filtration control panel - Chlorine production: manual or automatic with ORP set - pH dosing pump 2,4 l/h - Proportional pH control - Water temperature measuring - Automatic wintering at 15°C - LCD screen - Adjustable lack of water protection, salt level & cell defect - Supplied with 5 connection manifold, installation elements & temperature, salt & pH probes.

	code
1 Pool command	355460401
1 Pool command VS	355410199
2 LR-MB	355450301
3 Pool guard	355410205
3 Pool guard 2	355410215
4 Pool sense	355410201
5 Pool LR-PR	355410206
6 Press probe	355410216



Filtration control panel with built-in INDYGO Pool command - Monophased wired pre-equipped - Intelligent clock - Thermo-regulated filtration - Supplied with temperature probe - Auxiliary 1 connected to the projectors - Bluetooth filtration monitoring - Internet connection with LR-MB communication gateway plug-in - IP55.

	code
Filtration control panel	351153058
	351153108

Skimmer level control panel



Level control panel for pools with skimmer & spas - Low consumption of water - 1 m wire adjustable probe - Probe/panel connection up to 80 m - Water detection without electric contact - Anti-wave temporisation, filling protection & frost protection (at 3°C) - Supplied with 2 quick & tight installation sets (with Scotchlock threads) - 24V solenoid valve to be added.

Epsil'O

code

35220001

Above ground & small pool heat pump

Anti-corrosion & anti-UV housing - Operation up to 10°C (heating only) - 32/38 mm connection (fluted ends) - Free app connection & monitoring - Dimension: 418 x 399 x 420 mm - Wire 3 x 2,5 mm² - Sound pressure 46 d(B) at 10 m.



	power (kW)		COP at 27°C	flow (m ³ /h)	pool volume (m ³)	power consumption (kW)	current consumption (A)	code
HAYWARD	air 15°C water 26°C	air 27°C water 26°C						
HP2021	1,5	2,5	4,12	1,1	10	0,6	2,7	201039090
HP2031	2,23	3,5	5,12	1,6	20	0,68	2,95	201039130

Heat exchanger

For all kind of heating techniques - Low consumption circulator - Electronic controller & flow switch - Salty water compatible.



	primary 90°C (kW)	primary 60°C (kW)	primary 45°C (kW)	pool volume (m ³)	primary flow (m ³ /h)	secondary flow (m ³ /h)	code
ZODIAC							
Heat Line	20	8,5	4	50	0,9	10	203062020
	40	17	8	120	1,7	15	203062040
	70	30	14	200	3	20	203062070

Other colours
on request

Shell fittings



Skimmer

For concrete & liner pool - White ABS - Supplied with cap - 322 mm wall bushing - 40 mm overflow - 5 to 6 m³/h.

code

301215070



Level control

Max. inlet pressure 2,5 bar - Ø 3/4" connection to potable water - 275 mm height - 209 mm diameter - 50 mm connection.

code

301252000



Projector

White ABS - White or color led 12 V - 2,5 m cable - Without cable gland.

16 W - 1485 lumen

27 W - 1100 lumen

code

301283070

301283570



Cable sheath

1 m.

code

301239001



Connection box

For projector - 3 outlets - Supplied with 2 cable glands.

code

301251000



Discharge device

For concrete & liner pool - White ABS - Supplied with cap - 6 m³/h flow - 100 mm diameter - 50/2" connection.

code

301241070



Suction point

For concrete & liner pool - White ABS - Supplied with cap - 100 mm diameter - 50/2" connection.

code

301245070



Wall bushing - Concrete

300 mm length - Usable 250 mm & 175 mm - 110 mm diameter - 50/2" connection.

code

301253010



Wall bushing - Liner

300 mm length - Usable 250 mm & 175 mm - 118 mm diameter - 50/2" connection.

code

301253070



Main drain

For concrete & liner pool - White ABS - Ø 12,5 mm grid - 6 m³/h max. flow - 230 mm diameter - 2" connection.

code

301221070



Nipple

F 50 - M 2".

F 63 - M 2".

code

5523575020

5523576320



Lamp PAR 56

300 W - 12V.

code

309011300



Extra thin led 3096

21 W - 252 led - 2100 lumen - 4 m wire.

code

3096872520

3096872528



On/off radio control

For led 3096.

code

309690003

PVC pipes valves & fittings

To be glued.



Elbow 90°

Ø	pack	code
50	60	5523105050



Elbow 45°

Ø	pack	code
50	150	5523155050



Tee

Ø	pack	code
50	80	5523305050



Threaded union

Ø	pack	code
1 1/2 - 50	45	5523625015
2" - 50	40	5523625020



Ball valve

Ø	pack	code
32	30	5523903200
50	24	5523905000
63	16	5523906300



Ball check valve (vertical mounting only)

Ø	pack	code
50	24	5523805050
63	16	5523806363



3 way manifold collector

Ø	pack	code
50 - MMM50/F50	12	5523755050



Nipple

Ø	pack	code
50	100	5523405050



Reduced nipple

Ø	pack	code
M63/F50	90	5523456350



Union

Ø	pack	code
50	100	5523605050



Threaded reduced nipple

Ø	pack	code
F40/M50 - 1 1/2	130	5523574015
F50/M63 - 2"	75	5523575020



Ball valve w/ control ball



Ø	pack	code
32	25	5521913200
50	15	5521915000
63	8	5521916300



Transparent ball check valve

Ø	pack	code
50	1	5524805000
63	1	5524806300



NEW

Flexible pipe B-Active

Ø	pack	code
50	12	5513050125
63	6	5513063125

25 m coil



Rigid pipe B-Active

Ø	pack	code
50	24	5513050201
63	15	5513063201

1,18 m length

Sealing products



POOL TITE® glue

118 ml

237 ml

473 ml

professional use - Contains THF

code
555011118
555011237
555011473



FIX ALL HIGH TACK glue

Masonry work - Powerful & immediate positioning - Grey - 290 ml cartridge.

code
5550203120



Expansive foam

Blocking & filling - 600 ml spray.

code
5550613600



Spray 8 in 1

Rust protection, lubricant, cleanser, anti-moisture, anti-corrosion, shock-proof - 400 ml spray.

code
5550310408



Silicone spray

Lubricant, hydrophobic barrier, wear-proof - 400 ml spray.

code
5550410400



FIX ALL sealant-glue

125 ml tube

code
5550203128



POOL FIX sealant-glue

290 ml cartridge

White

Transparent

code
5550213280
5550213288



Sealing fiber

For metal fittings - 40 g braid.

code
5550303040



Sealing paste


For metal fittings - 100 ml tube.

code
5550303100



Maintenance accessories

Maintenance set	Manual brush, liner broom head, depth net, thermometer, analysis water set (chlorine, bromine, pH).	code
		601404899



Depth net	With pickup-debris scraper.	Mesh L x 1 mm	code
		601101200	
		Mesh 5 times thinner	601101205



Liner broom head	Supplied with anti-piling valve & lateral brush.	code
		601101100



12 wheel broom head	For concrete pool.	code
		601101112



Manual brush	Reinforced nylon - 48 cm width.	code
		601101405



Telescopic handle	Aluminium - For above depth net & brooms - 2,45 to 4,6 m - 2 pieces.	code
		601121946



Broom hose	EVA with PE interior spiral - 9 m - Ø 44 mm ext., Ø 38 mm int.	code
		602013809



Aquachek Yellow	4 in 1 - 50 strips - Chlorine, pH, alkalinity, cyanuric acid test.	code
		6010880141



Universal pre-filter	For skimmer basket.	code
		36 boxes
		12 pre-filters
		code
		601096033
		code
		601096031

Outdoor showers



Solar shower	25 l - 223 cm height - Polyethylene - Supplied with rinse-foot tap - Italian design & manufacturing.	Anthracite	code
			604501107
		White	code
			604501100

Classic shower	198 cm height - Polyethylene - Hot/cold water - Italian design & manufacturing.	White	code
			604511200